




## T-Lok® BM01 - Dome Head

	Material	Finish
Body	Low carbon steel to BS 3111 Type 0 SAE 1015/1018 DIN 1654 Cq15	Zinc plated and yellow passivated to BS EN 12329
Mandrel	Low carbon steel to BS 3111 Type 0 SAE 1015/1018 DIN 1654 Cq15	Zinc coated (4.3mm can be phosphate coated)

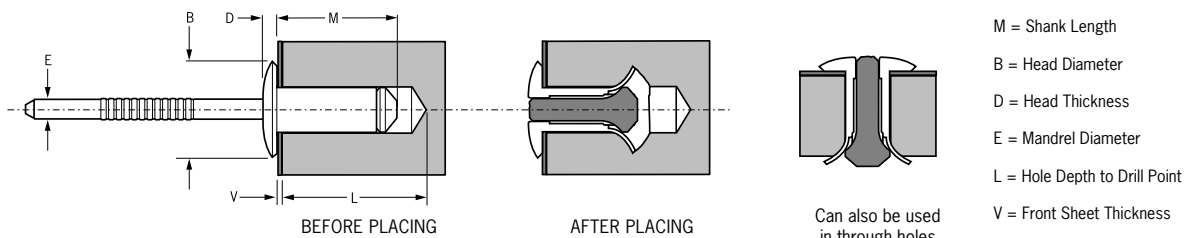

### Dimensions & Performance Data

Fastener Size nom.	M max.	Part Number	B max.	D max.	E max.	V max.	V min.	L min.		Pull Out N
								for max. V	for min. V	
<b>4.3</b>  4.3 4.4	10.9	<b>OBM01-00510</b>	8.2	1.3	2.5	1.3	0.3	7.6	8.7	0.4
	12.4	<b>OBM01-00512</b>	8.2	1.3	2.5	1.3	0.3	9.1	10.2	0.7
	18.7	<b>OBM01-00520</b>	8.2	1.3	2.5	7.6	0.3	9.1	16.5	0.7
	20.4	<b>OBM01-00522</b>	8.2	1.3	2.5	9.1	0.3	9.1	18.0	0.7
<b>4.8</b> ( <sup>3</sup> / <sub>16</sub> " )  4.8 4.9	14.3	<b>OBM01-00614</b>	10.2	2.0	2.9	3.1	0.3	9.2	12.0	0.9
	18.9	<b>OBM01-00620</b>	10.2	2.0	2.9	7.6	0.3	9.2	16.7	0.9

Dimensions in millimetres

### Installation Tools

The tables below show the range of Avdel® handtools which can be used to place T-Lok® fasteners. For further information on installation tools please refer to pages 72-82. For further information on specific nose equipment, please contact your local TFS representative.

#### Power Tools

Fastener Size	Genesis®					
	G1 (7120)	G2 (7121)	G2-s (7140)	G3 (7122)	G4 (7123)	TX2000® Battery Powered
<b>4.3</b>	✓	✓	✓	✓	✓	✓
<b>4.8</b> ( <sup>3</sup> / <sub>16</sub> " )		✓	✓	✓	✓	✓

#### Manually Operated Tools

Fastener Size	07597 Hand Pliers
	<b>4.3</b>
<b>4.8</b> ( <sup>3</sup> / <sub>16</sub> " )	✓