


Material	Finish
Aluminium alloy (5% magnesium) to BS 1473 5056A DIN 1725 AlMg5 Werkstoff 3.3555	Natural

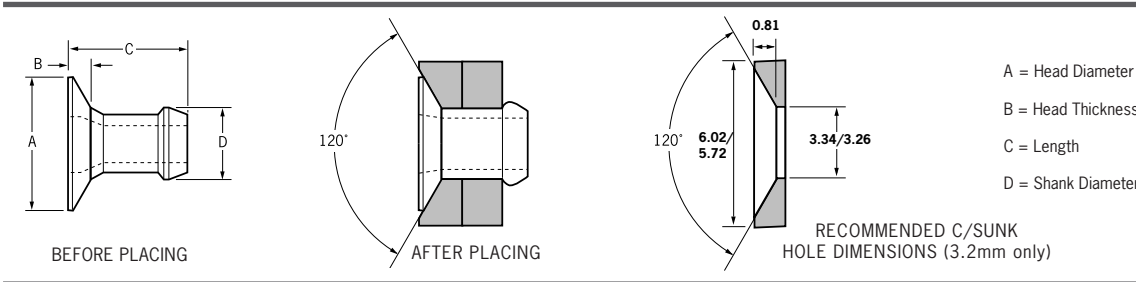


Dimensions and Performance Data

Fastener Size	Grip Range		Hole Size		Part Number	Fasteners per pod*	A		B	C	D	(Typical Values)		
	nom.	min.	max.	min.			max.	min.	max.	max.	max.	max.	Shear kN	Tension kN
3.2 (1/8")		1.52	2.79			64				4.77				
		2.54	3.81			52				5.79				
		3.56	4.83	3.26	3.34	01802-00408	44	5.08	5.97	0.89	6.81	3.163	0.7	1.3
		4.57	5.84			01802-00410	38				7.82			
		5.59	6.86			01802-00411	33				8.84			
4.0 (5/32")		1.57	2.93			59				5.18				
		2.15	3.43			54				5.69				
		2.66	3.94	3.97	4.04	01802-00507	49	6.09	6.98	1.02	6.19	3.899	1.1	1.7
		3.68	4.96			01802-00509	42				7.21			
		4.69	5.97			01802-00511	36				8.22			
	5.71	6.99			01802-00513	32				9.24				

Dimensions in millimetres

*Nominal value only. Tolerance +1 fastener per pod.

Material	Finish
Low carbon steel to BS 3111 Type 0 SAE 1008 DIN 1654 Q St 34-3	Zinc plated to BS EN 12329

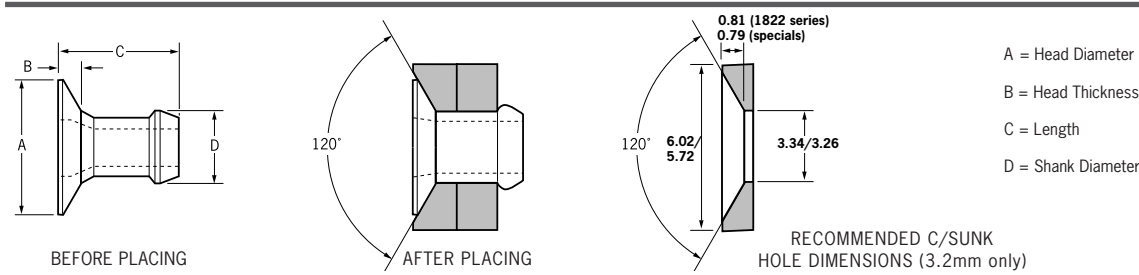

Dimensions and Performance Data

Fastener Size nom.	Grip Range		Hole Size		Part Number	Fasteners per pod*	A		B	C	D	(Typical Values)	
	min.	max.	min.	max.			min.	max.	max.	max.	max.	Shear kN	Tension kN
3.2 (1/8")	1.52	2.79			01822-00406	64				4.77		0.9	1.6
	2.54	3.81			01822-00407	52			5.79				
	3.56	4.83	3.26	3.34	01822-00408	44	5.08	5.84	0.76	6.81	3.163		
	4.57	5.84			01822-00410	38				7.82			
	5.59	6.86			01822-00411	33				8.84			
4.0 (5/32")	1.57	2.93			01822-00505	59				5.18		1.6	2.8
	2.15	3.43			01822-00506	54				5.69			
	2.66	3.94	3.97	4.04	01822-00507	49	6.09	6.98	1.02	6.19	3.899		
	3.68	4.96			01822-00509	42				7.21			
	4.69	5.97			01822-00511	36				8.22			
	5.71	6.99			01822-00513	42				9.24			

Dimensions in millimetres

*Nominal value only. Tolerance ±1 fastener per pod.

Special Option

3.2mm (1/8") steel countersunk Briv® designed for thin sheet applications.

Dimensions and Performance Data

Fastener Size nom.	Grip Range		Hole Size		Part Number	Fasteners per pod*	A		B	C	D	(Typical Values)	
	min.	max.	min.	max.			min.	max.	max.	max.	max.	Shear kN	Tension kN
3.2 (1/8")	1.27	2.29	3.26	3.34	01810-06480	72	5.08	5.84	0.74	4.32	3.163	0.9	1.6
	1.45	1.70	3.26	3.34	01810-10375	72	5.08	5.84	0.69	4.19	3.163	0.9	1.6

Dimensions in millimetres

*Nominal value only. Tolerance ±1 fastener per pod.