


Klamp-Tite™ BAPKTR

Protruding Head, Aluminium Alloy Body
and Mandrel

	Material	Finish
Body	Aluminium Alloy	Wax Lubricated
Mandrel	Aluminium Alloy	Wax Lubricated

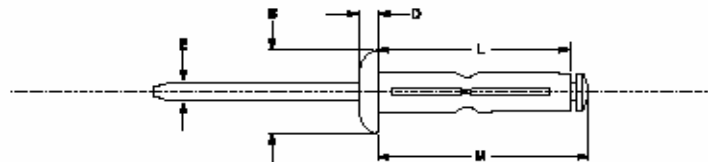

M = Rivet Length
B = Head Diameter
D = Head Thickness
E = Mandrel Diameter
L = Blind Length

Dimensions & Performance Data

Fastener Size	M	Grip Range		Part Number	B	D	E	L	(Typical Values)	
		nom.	max.						min.	max.
4.8 (1/4")	30.74	1.27	6.35	BAPKTR-06W-04	11.3	2.2	2.6	22.6	3.1	2.0
5.0	33.02	4.75	9.53	BAPKTR-06W-06*	11.3	2.2	2.6	25.0	3.1	2.0
5.18 5.31	36.32	9.53	14.27	BAPKTR-06W-09	11.3	2.2	2.6	28.5	3.1	2.0
	41.15	14.27	19.05	BAPKTR-06W-12*	11.3	2.2	2.6	32.0	3.1	2.0
6.4 (1/4")	33.02	1.52	6.35	BAPKTR-08W-04	14.2	2.9	3.5	23.5	6.0	4.5
6.5	36.07	4.75	9.53	BAPKTR-08W-06	14.2	2.9	3.5	26.7	6.0	4.5
6.40 6.65										

Dimensions in millimetres.

*90° countersunk head available - BAPKTR-06W-06 and BAPKTR-06W-12. Dimensions, shear and tension values as above apart from B (head diameter) = 8.6mm and D (head thickness) = 1.8mm.

A synthetic rubber washer can be ordered to fit under protruding head fasteners eg: BAPKTR-6W6

Note:

Klamp-Tite™ structural fasteners replace TLR® 3904 and 3901 series.