

B8-4 Grab Handle

Small · Surface mount

Features

- Front or rear concealed installation
- Light-weight

Material



- Handle: ABS plastic, black
- Screws: Steel, zinc plated

Installation Notes


- Rear install concealed: M6 x 32 screw assembly supplied
- Maximum tightening torque of screws: 4.0 N.m
- For door thickness greater than 16 calculate screw length using the following formula: Door thickness + 16

Product Performance



- Flammability rating: UL94-HB
- Operating temperature range: -50 °C to 60 °C
- Maximum static load: 550 N

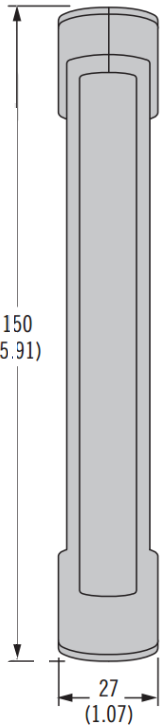

Rear Install Concealed

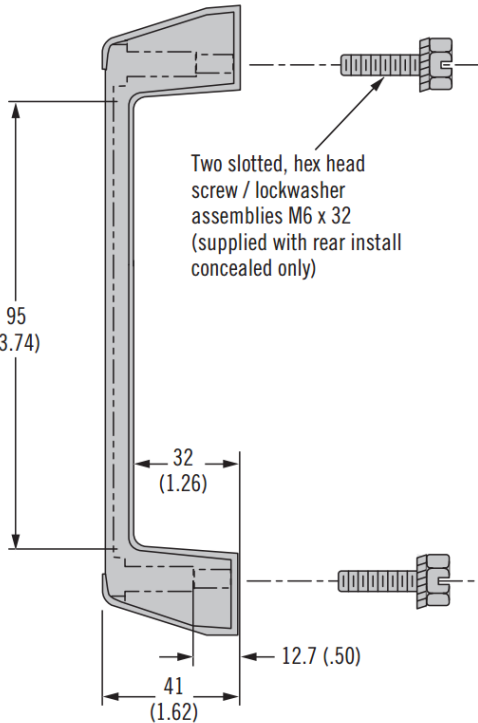

Front Install Concealed

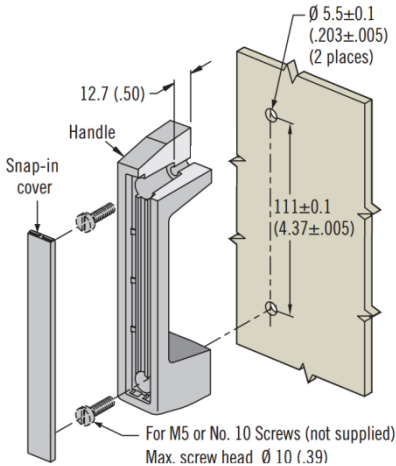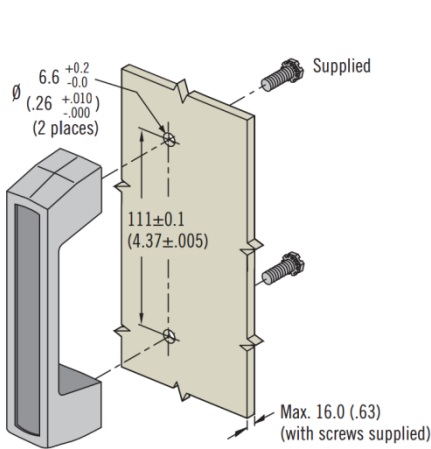

Part Number	
Rear Install Concealed	Front Install Concealed
B8-45-3	B8-43-3