

## B8-6 Grab Handle

Large · Surface mount

### Features

- Front or rear concealed installation
- Ergonomic, comfortable grip
- High strength, lightweight solution

### Installation Notes




- Maximum tightening torque of screws:  
Rear install concealed only 4.0 N.m

### Material

- Handle: ABS plastic, black
- Screws: Steel, zinc plated



### Product Performance

- Flammability rating: UL94-HB
- Operating temperature range: -40 °C to 60
- Maximum static load: 775 N

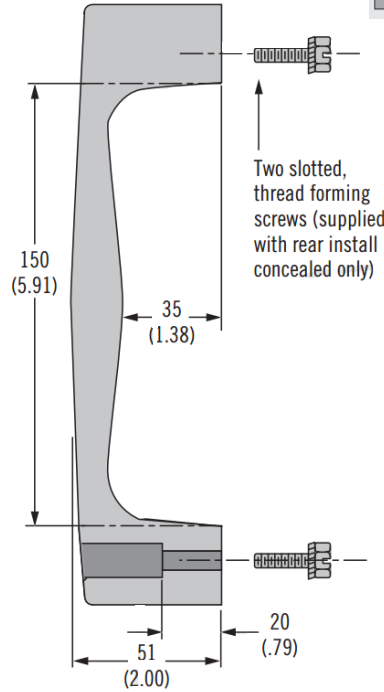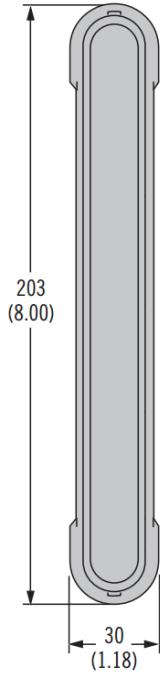

### Rear Install Concealed

### Front Install Concealed

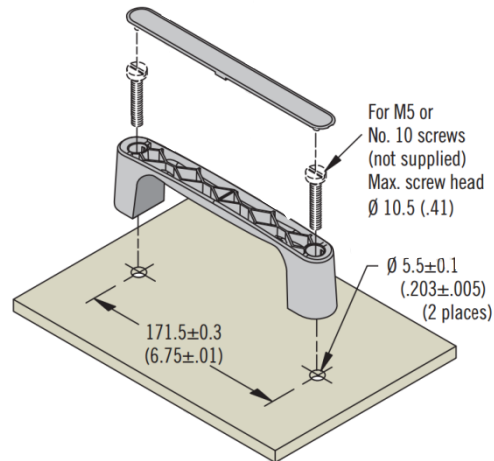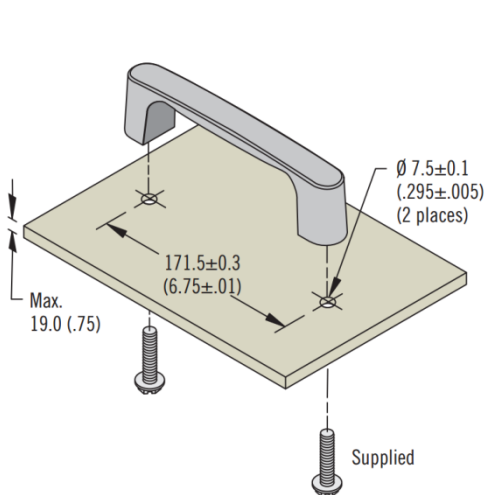

Part Number	
Rear Install Concealed	Front Install Concealed
B8-66-3	B8-63-3