

GG6 Moulded Steel-Cored Handles

Features

- Semi-rigid surface, no hard edges
- With plugs to conceal fixings
- Designed for applications which require great strength, good aesthetics and user-friendliness

Material


- Moulded in thermoplastic elastomer around steel core, with gloss, black textured finish

Product Performance

- Load capacity for **GG6-G00404**:
 - Parallel to fixing - 19,470 N
 - Vertical to fixing - 12,830 N
 - Ultimate strength - over 1,000 kg
 - Recommended safe working load - max. 500 kg
- Load capacity for **GG6-G00405**:
 - Parallel to fixing - 13,670 N
 - Vertical to fixing - 12,030 N
 - Ultimate strength - over 1,000 kg
 - Recommended safe working load - max. 500 kg

Notes

- Installation by bolting through holes in steel core

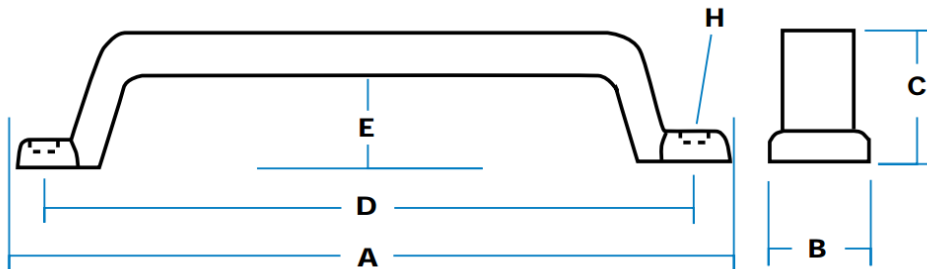

After fixing it is recommended that cover plugs are permanently retained with a suitable adhesive

Textured plugs available for 15 mm diameter G00404-MP00444 and 18 mm diameter (G00405-MP00445)

Part No.	A	B	C	D	E	H	Hole Size Diameter Recess
GG6-G00404	190	28	50	157	32	8	15
GG6-G00405	280		55	253	37		18