

GSOR Aluminium Door Handle

Features

- Flowing curves that adapt gracefully to any surface
- Other handle sizes available on request (MOQs apply)
- Suitable for applications including machine equipment and vehicles


Notes

- For single-sided mount, cannot be used for double-sided mount
- Recommended screws: M6, M8




No.	Part Name	Material
①	Body	Aluminium Alloy
②	Insert	Stainless Steel (SCS13)
③	Screws	Stainless Steel

※SCS13 is equivalent of SUS304.

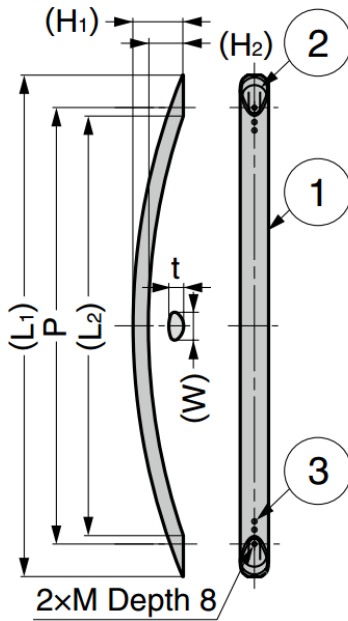

GSOR-400, 600, 800, 1000

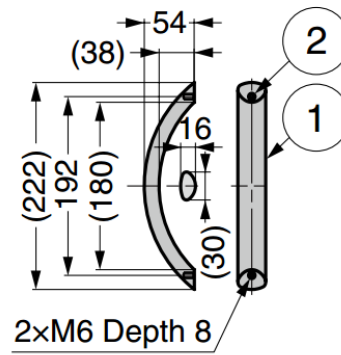

GSOR-200

Part No.	Finish	L ₁	L ₂	P	H ₁	H ₂	W	t	M	Load Capacity
GSOR-200S	Stainless Steel / Anodised	As above								
GSOR-200BL	Black / Anodised	As above								
GSOR-400S	Stainless Steel / Anodised	390	323	335	60	42	34	18	M6	490 N 50 kg
GSOR-400BL	Black / Anodised									
GSOR-600S	Stainless Steel / Anodised	600	502	522	80	59.8	38	20.2	M8	
GSOR-600BL	Black / Anodised									
GSOR-800S	Stainless Steel / Anodised	816	686	710	80	59.8	38	20.2	M8	
GSOR-800BL	Black / Anodised									
GSOR-1000S	Stainless Steel / Anodised	1090	939.8	975	80	59.8	38	20.2	M8	
GSOR-1000BL	Black / Anodised									