

GHH-P Recessed Pull

Features




- Rounded design allows for easy gripping and handling with gloved hand (compliant with SEMI standard, SEMI S8-0308)
- Clear body suitable for transparent door such as acrylic
- Lead-free PVC material with excellent weather and chemical resistance
- Suitable for semiconductor manufacturing equipment

Notes

- Supplied screws are suitable for panel thickness 1 ~ 5mm. For other panel thickness, to prepare screws with threaded length above 10 mm according to the panel thickness

Parts Included

- Fixing piece
- Truss head screw M4×20 (**GHH-P118**)
- Truss head screw M5×20 (**GHH-P130**)

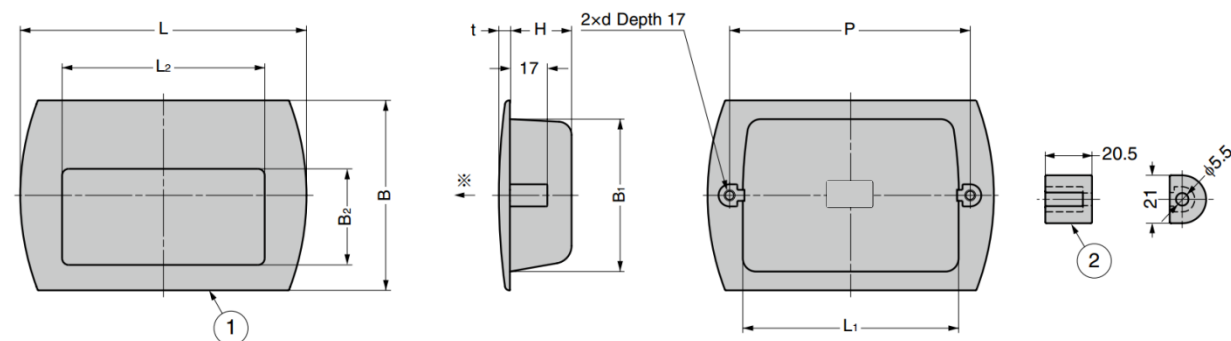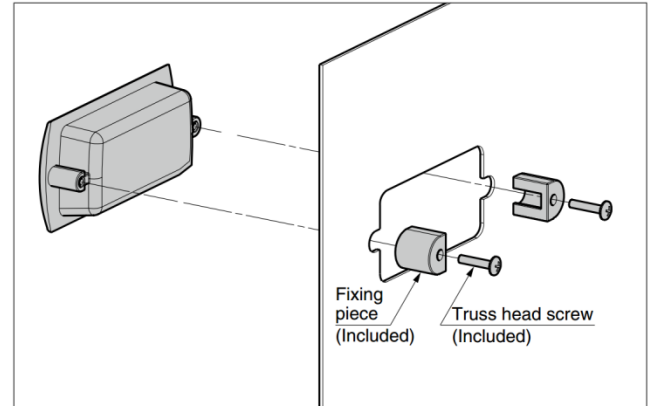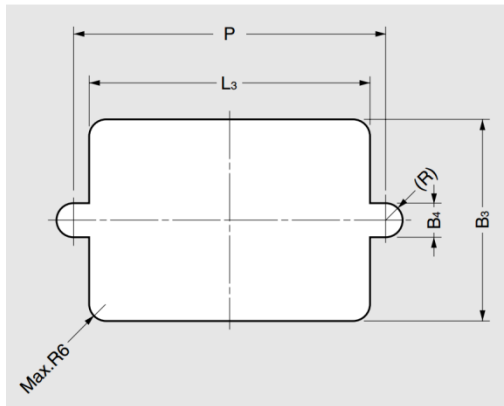

No.	Part Name	Material	Colour
①	Body	PVC	Clear
②	Fixing Piece		

Part No.	L	L ₁	L ₂	B	B ₁	B ₂	H	P	d	t	L ₃	B ₃	B ₄	Board Thickness	Load Capacity*	
GHH-P118	118	93	90	58	47	25.5	21.5	104	M4	4	95	48	11	1 ~ 11	312 N	31.8 kg
GHH-P130	130	98	92	86	69	43.5	28	110	M5	5	99	71	12		460 N	47 kg

*Load capacity is for the direction ※ marked in drawing