

### GB13 Stainless Steel T & L-Handle

#### Features

- 'Easy-fix' mounting through a standard panel piercing
- Constructed of stainless steel for corrosion resistance and good appearance
- Satin finished handles with 8 mm stainless steel shaft, or with directly fitted cam pawl
- 180° movement against stops

#### Material

- Stainless steel 300 series, satin finish

#### Notes

- Mount through panel piercing against 'flats' on escutcheon and secure with large stainless nut
- Neoprene gasket and stainless spring spacing washer are provided
- **Contact Gripwell sales for cam pawl and centre-case options**






**GB13-G01605**


(Stainless L-handle with escutcheon & 8 mm shaft)

**GB13-G01615**

(Stainless T-handle with escutcheon & 8 mm shaft)

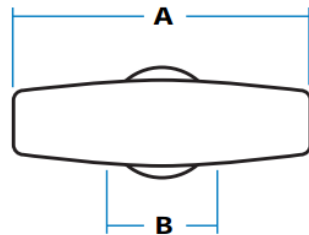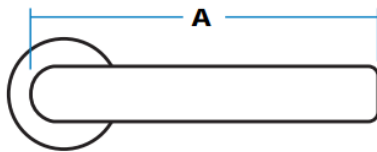

Panel-piercing detail (WBH)

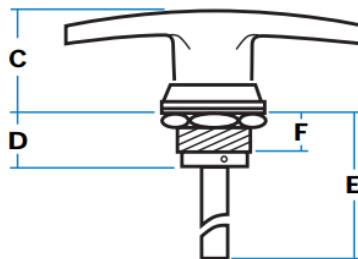

**GB13-G01610**

(Stainless T-handle with fitted cam pawl)

'T' handle with fitted cam pawl. This model has a stainless cam pawl (**G00097**) with 10 mm 'crank', fitted directly to the rear of the handle casting.

| Part No.           | Type                       | Handle   | A   | B  | C  | D  | E  | F  | H  | J  |
|--------------------|----------------------------|----------|-----|----|----|----|----|----|----|----|
| <b>GB13-G01605</b> | With escutcheon & shaft    | L-handle | 112 | 30 | 35 | 18 | 63 | 10 | 22 | 24 |
| <b>GB13-G01615</b> |                            | T-handle | 80  |    |    |    |    |    |    |    |
| <b>GB13-G01600</b> | With escutcheon & cam pawl | L-handle | 112 |    |    |    |    |    |    |    |
| <b>GB13-G01610</b> |                            | T-handle | 80  |    |    |    |    |    |    |    |