

GB5 Lever L-Handle With Surface Mounting

Features



- Good-looking handle with rectangular, surface mounted escutcheons for either open or concealed fixing
- Lock cylinders are "shuttered" for weather resistance and there is choice of 38 mm or 44 mm hole centres
- 180° rotation as standard, rotation can be limited to 90°, LH/RH, or 360° free-movement.
- Use with latching cams, slam latches or rod systems

Material

- Steel, chromium plated (or black powder coated on request)

Notes

- Fix through countersunk holes, or with concealed-fixing models using screws provided (M4 x 8 mm) to secure from beneath
- Neoprene gasket provided
- 'FS' keys as standard with 'shuttered' keyway. Optionally 'FT' or 'DLP' key types also available
- **Contact Gripwell sales for cam pawl and centre-case options**

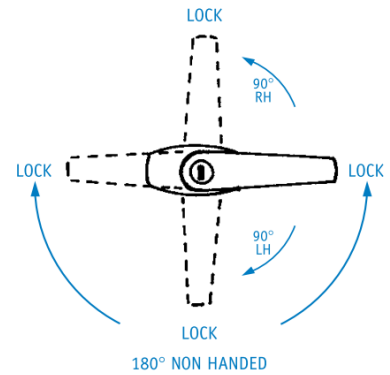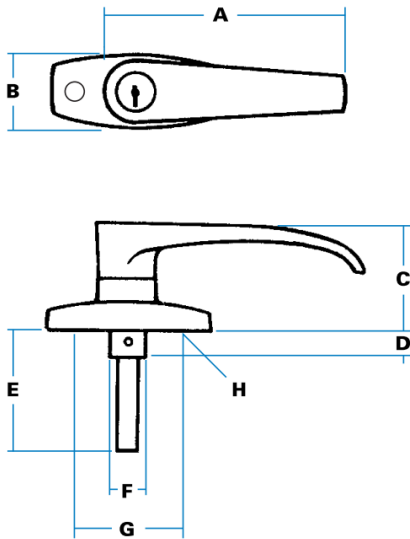

Handles operate through 180° as standard (non-handed). To special order, rotation can be limited to 90° LH (clockwise) or 90° RH (anticlockwise). Handles will lock at each 90° position.

Part No.	Type	Key	A	B	C	D	E	F	G	H	
GB5-G00167	38 mm Open Fixing	Standard	115	33	42	10	125	14	38	5 mm, c/s 9 mm	
GB5-G00167-01		FS880									
GB5-G00170		Non-Locking									
GB5-G00171	38 mm Concealed Fixing	Standard									44
GB5-G00171-01		FS880									
GB5-G00172		Non-Locking									
GB5-G00173	44 mm Open Fixing	Standard									
GB5-G00173-01		FS880									
GB5-G00183		Non-Locking									