

GB6 Small T-Handle With Surface Mounting

Features

- Widely-used cabinet handle with rectangular, surface mounted escutcheons for either open or concealed fixing
- Lock cylinders are "shuttered" for weather-resistance and there is choice of 38 mm or 44 mm hole centres
- 180° rotation as standard, rotation can be limited to 90°, LH/RH when required
- Use with latching cams, slam latches or rod systems

Material

- Steel, chromium plated (or black powder coated on request)

Notes



- Fix through countersunk holes, or with concealed-fixing models using screws provided (M4 x 8 mm) to secure from beneath
- Neoprene gasket provided
- 'FS' keys as standard with 'shuttered' keyway. Optionally 'FT' or 'DLP' key types also available
- **Contact Gripwell sales for cam pawl and centre-case options**



GB6-G00143
(Non-locking, small T,
38 mm concealed fixing)



GB6-G00140
(Locking, small T,
38 mm open fixing)

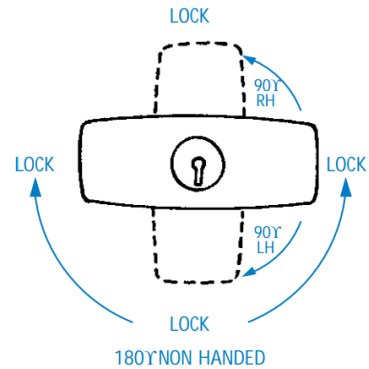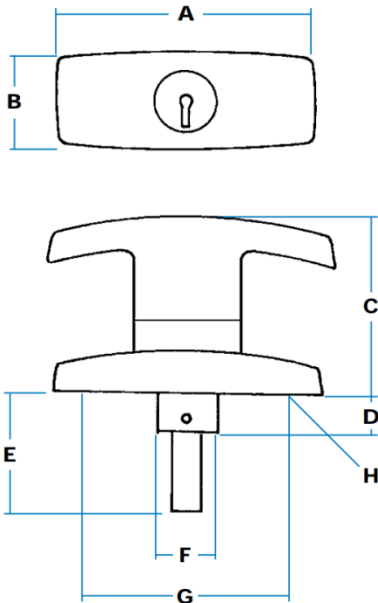

Handles operate through 180° as standard (non-handed). To special order, rotation can be limited to 90° LH (clockwise) or 90° RH (anticlockwise). Handles will lock at each 90° position.

Part No.	Type	Key	A	B	C	D	E	F	G	H	
GB6-G00140	38 mm Open Fixing	Standard	65	33	42	10	125	14	38	5 mm, c/s 9 mm	
GB6-G00140-01		FS880									
GB6-G00141		Non-Locking									
GB6-G00142	38 mm Concealed Fixing	Standard									44
GB6-G00142-01		FS880									
GB6-G00143		Non-Locking									
GB6-G00240	44 mm Open Fixing	Standard									
GB6-G00240-01		FS880									
GB6-G00241		Non-Locking									