

GB7 Large T-Handle With Surface Mounting

Features


- The most generally used industrial handles, with rectangular, surface mounted escutcheons for either open or concealed fixing
- Lock cylinders are “shuttered” for weather-resistance and there is choice of 38 mm or 44 mm hole centres
- 180° rotation as standard, rotation can be limited to 90°, LH/RH, or 360° free-movement
- Use with latching cams, slam latches or rod systems

Material

- Steel, chromium plated (or black powder coated on request)

Notes


- Fix through countersunk holes, or with concealed-fixing models using screws provided (M4 x 8 mm) to secure from beneath
- Neoprene gasket provided
- ‘FS’ keys as standard with ‘shuttered’ keyway. Optionally ‘FT’ or ‘DLP’ key types also available
- **Contact Gripwell sales for cam pawl and centre-case options**

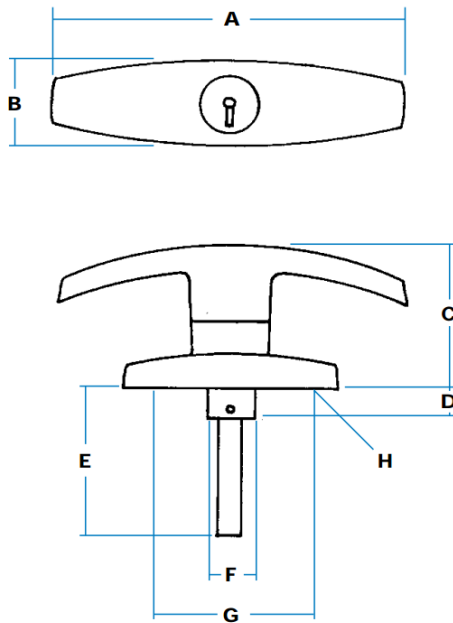

GB7-G00147
(Non-locking, large T,
38 mm concealed fixing)



GB7-G00144
(Locking, large T,
38 mm open fixing)

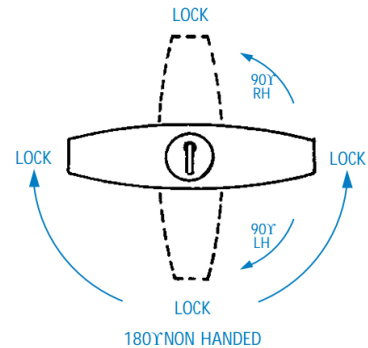

Handles operate through 180° as standard (non-handed). To special order, rotation can be limited to 90° LH (clockwise) or 90° RH (anticlockwise). Handles will lock at each 90° position.

Part No.	Type	Key	A	B	C	D	E	F	G	H	
GB7-G00114	38 mm Open Fixing	Standard	100	33	42	10	125	14	38	5 mm, c/s 9 mm	
GB7-G00114-01		FS880									
GB7-G00145		Non-Locking									
GB7-G00146	38 mm Concealed Fixing	Standard									44
GB7-G00146-01		FS880									
GB7-G00147		Non-Locking									
GB7-G00244	44 mm Open Fixing	Standard									
GB7-G00244-01		FS880									
GB7-G00245		Non-Locking									