

GF10 Fixed Pin Vertical Leaf Hinge

Features


- Fixed-pin hinge and non-handed
- Attractive and useful hinge for large enclosures where door frame width is restricted, but where relatively heavy loading is anticipated
- Mirror polished stainless steel in 3 mm material thickness, with end caps and large-diameter stainless pin and bearing washers for smooth movement and corrosion resistance
- Hinge opens fully forward to 180°, and backward to 90° from horizontal
- Plant-on, and secured through countersunk holes in hinge leaf

Material

- Stainless steel 304, mirror polished

Product Performance

- Max. axial loading: 31,800 N (ultimate loading: 47,700 N)
- Max. radial loading: 10,530 N (ultimate loading: 15,800 N)

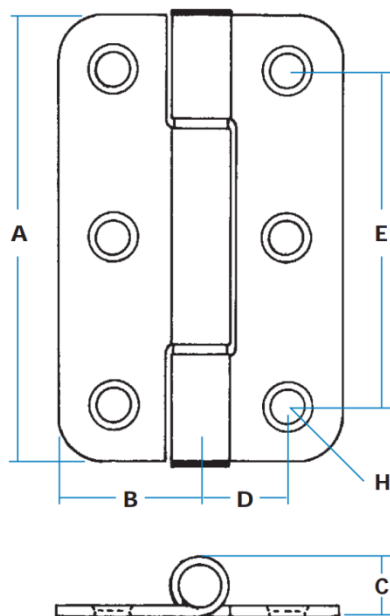

Concealed-fixing option with welded studs



To special order, hinges can be supplied with M8 threaded studs, welded to underside of hinge leaf in same position as normal holes.

Part No.	A	B	C	D	E	H	Pin Diameter
GF10-G01542	130	40	15	22.5	94	10 mm, c/s 15 mm	10