


G09HI Plastic Offset Lift-Off Hinge

Material

- High impact resistant thermoplastic, matt black finish

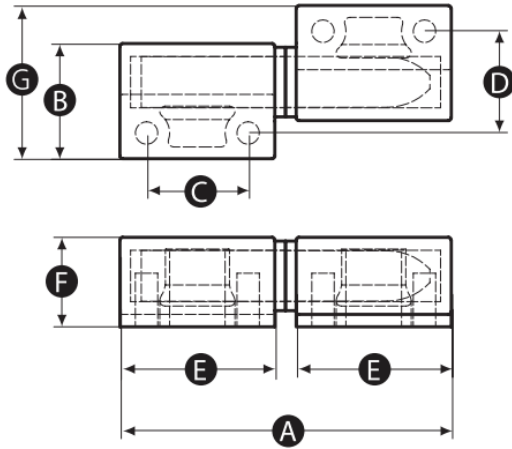


Part No.	A	B	C	D	E	F	G	Thread Size	Min. Thread Depth	Chirality
G09HI-15746V	62	22	19	19	29	17	29	M5	10	Left Handed
G09HI-15748Y										Right Handed
G09HI-15747R	83	28	25.5	25.5	38	22	38	M6	10	Left Handed
G09HI-14749U										Right Handed


Part No.	Radial Load	Axial Load	Recommended Tightening Torque	Approx. Shear Force Per Screw
G09HI-15746V	170 N	490 N	1.5 N.m	0.28 kN
G09HI-15748Y				
G09HI-15747R	220 N	640 N	2.5 N.m	0.50 kN
G09HI-14749U				

Mounting options

A Install hinges with matching vertical orientation to enable quick, easy and safe removal of doors without the use of tools.




B Install hinges with opposing vertical orientation to enable doors to be permanently mounted.



Chirality

Left-Handed



Right-Handed

