

GF3 Lift-Off Hinge (Blind Mount)

Features

- Designed without fixing holes provides an attractive smooth, and tamper-proof visible surface
- Fixing by two threaded studs, 15 mm x M8 on each leaf
- Excellent surface finish, 3mm material thickness and large-diameter stainless pin for easy assembly
- Available in either steel or stainless steel
- Available in left-hand and right-hand versions

Material




- Stainless steel models: Stainless steel, mirror polished
- Mild steel models: Mild steel, black powder coated

Product Performance

- Stainless steel models:
 - Max. axial loading: 8,000 N (ultimate loading: 12,100 N)
 - Max. radial loading: 4,100 N (ultimate loading: 6,100 N)
- Mild steel models:
 - Max. axial loading: 14,600 N (ultimate loading: 22,000 N)
 - Max. radial loading: 3,700 N (ultimate loading: 5,600 N)



illustration shows welded studs for concealed fixing

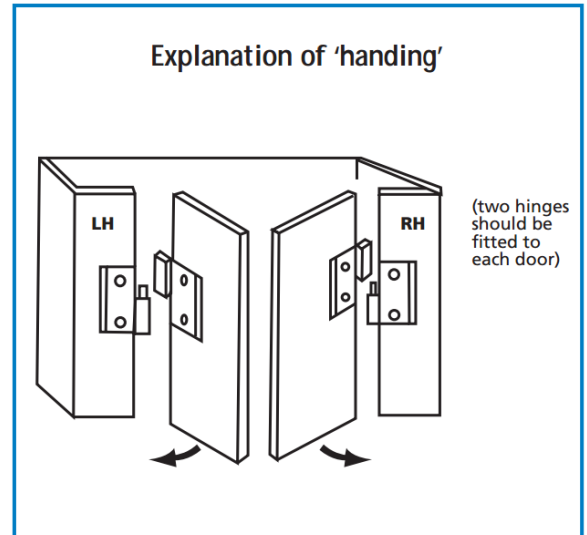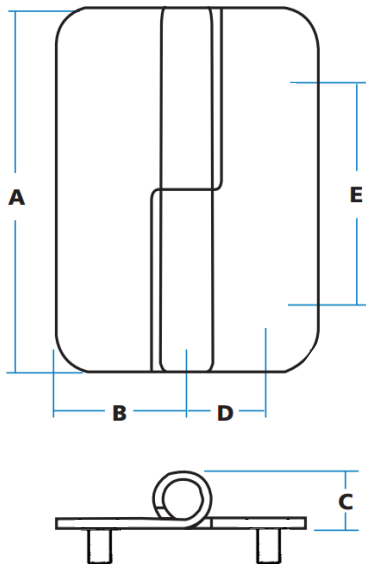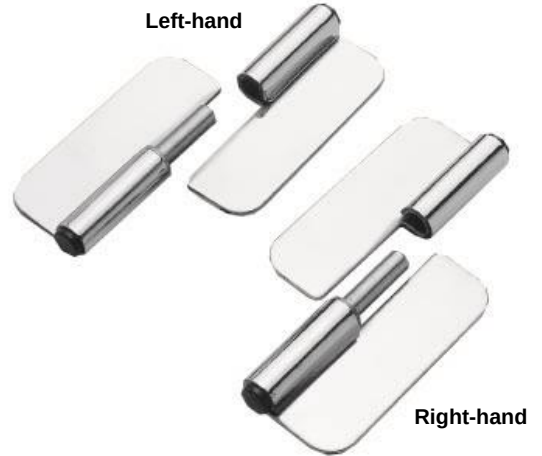

Part No.	Material	Type	A	B	C	D	E	Material Thickness	Pin Diameter
GF3-G01444	Stainless Steel	Right-hand	100	37	15	22.5	60	3	10
GF3-G01445		Left-hand							
GF3-G01539	Steel, Black	Right-hand							
GF3-G01538		Left-hand							