

GHG-SH Spring Hinge

Features



- Stainless steel construction suitable for corrosive environments

Material



- Stainless steel 304, barrel polished

Notes

- Torque given in the table below is the value when the hinge opens 90° (refer to ※)

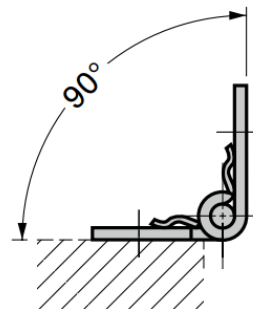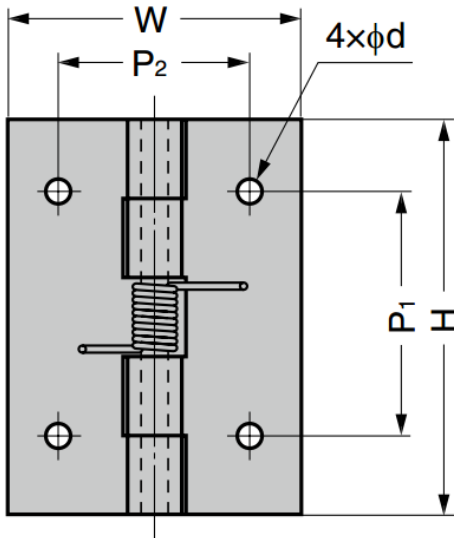

※When applying the torque given in the table below

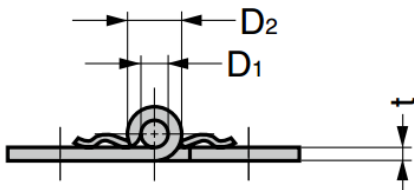

Free state

Part No.	H	W	P ₁	P ₂	D ₁	D ₂	d	t	Torque Moment		Load Capacity (per pair)	
GHG-SH-20C	20	14	-	-	1	2.2	-	0.5	9.7 cN.m	0.99 kgf.cm	9.8 N	1 kg
GHG-SH-25C	25	32	14	20	3	5.8	3.2	1.2	6.5 cN.m	0.66 kgf.cm	29 N	3 kg
GHG-SH-38C	38		26			6.5		1.5	14.7 cN.m	1.5 kgf.cm	59 N	6 kg
GHG-SH-51C	51	38	32	25					13.5 cN.m	1.38 kgf.cm	69 N	7 kg