


GSH-C Spring Hinge

Features

- All stainless steel construction

Notes

- Torque given in the table below is the value when the hinge opens 90° (refer to ※)

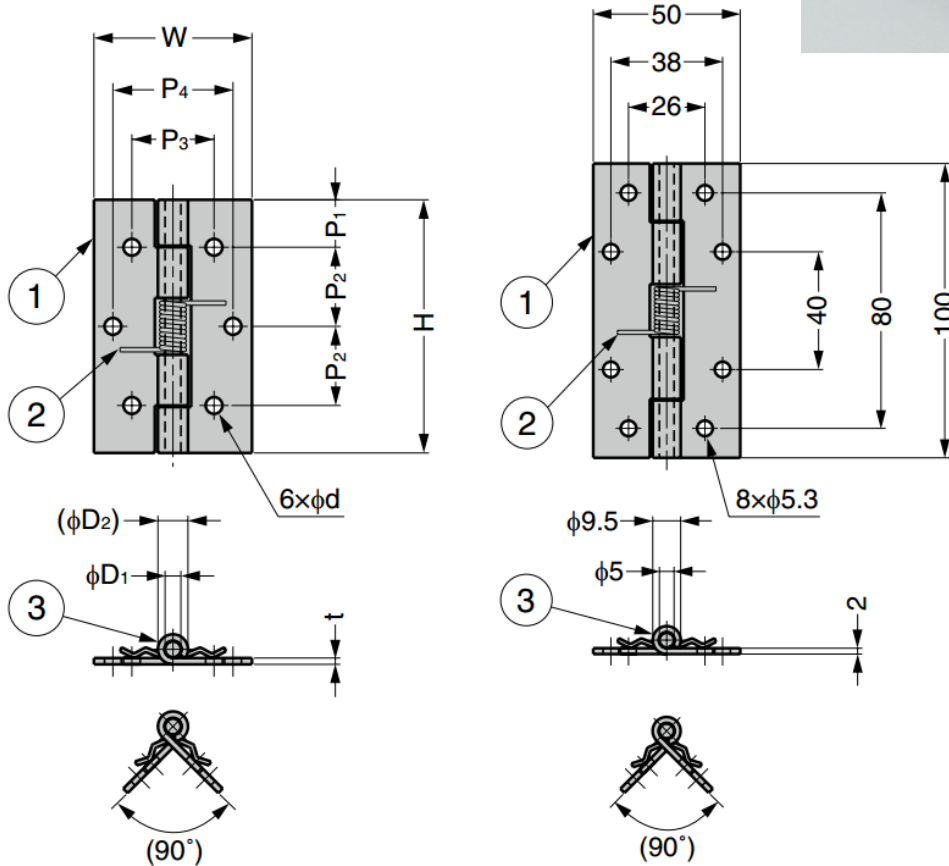

GSH-60C, GSH-80C

GSH-100C

※When applying the torque given in the table below

No.	Part Name	Material	Finish
①	Body	Stainless Steel (SUS304)	Barrel Polished
②	Spring		—
③	Shaft		

Part No.	H	W	t	P ₁	P ₂	P ₃	P ₄	D ₁	D ₂	d	Torque Moment		Load Capacity (per pair)	
GSH-60C	60	40	1.5	10	20	26	26	5	8.5	4.3	27.8 cN.m	2.83 kgf.cm	88 N	9 kg
GSH-80C	80	50	2	15	25		38		9.5	5.3	32.8 cN.m	3.34 kgf.cm	157 N	16 kg
GSH-100C	Refer to above drawing										97.7 cN.m	9.96 kgf.cm	196 N	20 kg