

GC33 Two & Three Way Slam System

Features


- These versatile systems are assembled on site from standard end-latches, together with centre case (opposite) and connecting bars. The three slam bolts act together and are withdrawn simultaneously.
- Left and right-hand versions are identical apart from position of centre bolt and direction of rotation of centre follow-bush. 2-way versions do not have centre slam-bolt.
- System slams shut, is opened by inside/outside handle or T-key. It can be slammed even when handle is locked, due to 'free movement' allowed by link bars.
- Rotation of centre follow-bush withdraws slam bolt fully into case, also withdraws links at each end, which operates slam latches. System is handed by position of centre-bolt and direction of operation of follow-bush.

Material

- Steel, zinc plated

Notes

- Components are fully plant-on, with 'quick fit' attachment of link bars to centre case. Plain end should be cut and drilled as required: rivets and washers are supplied with kit.
- Centre bolt withdraws by 11 mm maximum
- Normally supplied in boxed sets of 10 units
- All components are provided, including guides (G18617), strikers (G12341), rivets (G19-7) and wave washers (G58-21)

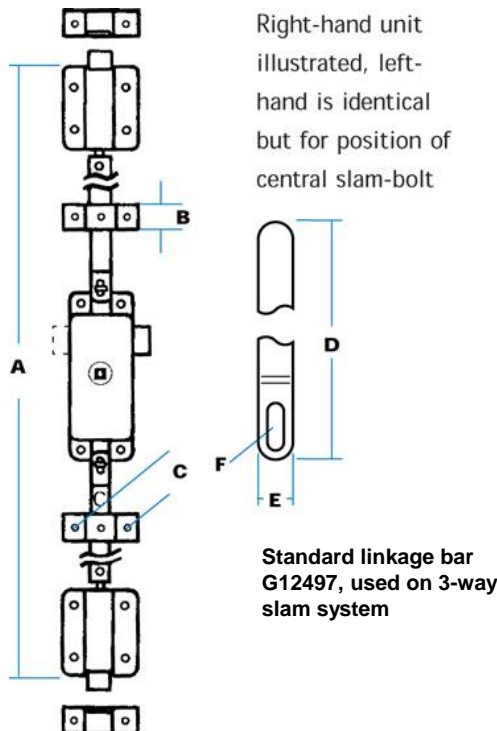

Complete right-hand assembly GC33-G18342 (includes all items shown)

Latch is shown as mounted on inside of panel

Part No.	Type	Direction	A	B	C	D	E	F
GC33-G18341	Complete 3-Way System	LH	2,057	25	40	915	12 x 3 mm (Cranked 5 mm Rolled edges)	22
GC33-G18342		RH						
GC33-G18343	Complete 2-Way System	LH						
GC33-G18344		RH						