

GD13 Utility Slam Latch

Features

- Plant-on latches with central follow-bush which rotates 45° in either direction to withdraw bolt
- Can be slammed even when handle is in 'locked' mode
- Latch slams against striker plate, bolt is released by action of follow-bush
- Latches are non-'handed'
- Two lengths of bolt available

Material


- Steel, zinc plated

Notes

- Fully plant-on fixings by bolts or rivets through three holes as shown
- Maximum bolt withdrawal: 10 mm
- Bolt-spring pressure for full travel: 5 kg



GD13-G02732
(with 6.5 mm holes
& 16 mm bolt)

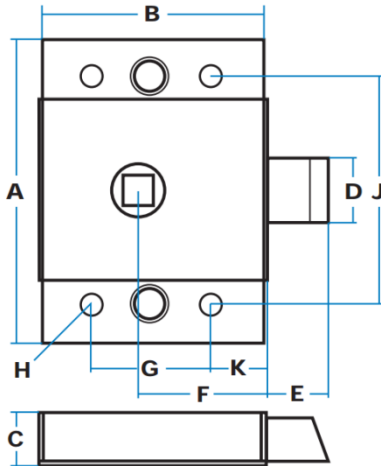


Part No.	Type	A	B	C	D	E	F	G	H	J	K
GD13-G02730	10 mm bolt	80	60	14	19	10	34	36	6.5	62	14
GD13-G02732	16 mm bolt					16					

'Original Model' Utility Slam Latch

Models below are identical but with mounting holes at 8 mm diameter, countersunk to 10 mm diameter (centre hole is an assembly feature only)

Part No.	Type	Nose
GD13-G17330	10 mm bolt	Standard 'nose-down'
GD13-G17332	16 mm bolt	
GD13-G01372	10 mm bolt	Standard 'nose-up'

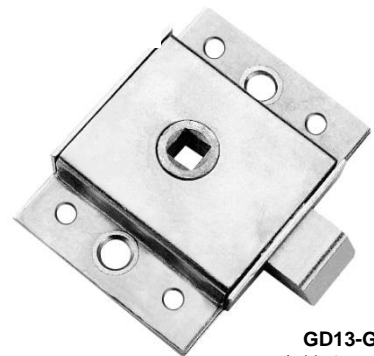

GD13-G17332
(with 8 mm holes &
16 mm bolt)