

24 Cam Latch

Flush T-Handle · Adjustable grip

Features



- Concealed mounting type

Material

- Zinc alloy and steel, zinc plated or stainless steel

Product Performance

- Maximum static load: 445 N
- Maximum tightening torque of mounting nuts not to exceed 2.8 N.m

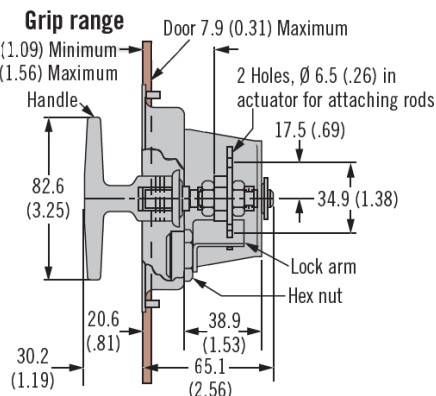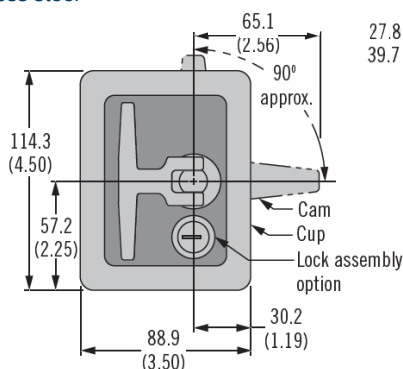

Part Number		
Style	With Mounting Studs	
	Cup and bracket polished stainless steel. Handle zinc chrome plated	Cup and bracket steel dacrotized. Handle zinc dacrotized
Locking keyed alike CH751 supplied	24-20-812-35	24-20-812-10
Non-locking	24-20-302-35	24-20-302-10
Non-locking environmentally sealed	24-20-312-35	24-20-312-10

92 Cam Latch

Compact T-handle . Adjustable grip

Features

- Easy cam adjustments

Notes



- Black and chrome finish available
- Gasket part number: 92-70-G (sold separately)

Material

- Zinc alloy, powder coated or chrome plated and steel, zinc plated

Product Performance

- Maximum static load: 150 N

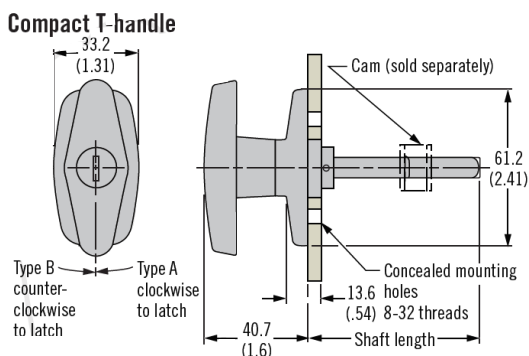

Finish	Shaft Length	Locking Compact-T Part Number	
		Type A	Type B
Black	38.1 (1.5) ¹	92-61-113-50	92-61-213-50
	50.8 (2.0)	92-61-114-50	92-61-214-50
	63.5 (2.5)	92-61-115-50	92-61-215-50

Cam Part Number
92-24-203-12

Compact T-handle style shown. T and L-handle style available. Locking and non-locking.

southco®

**We are proud to be
Southco's authorized
distributor of over 20 years**