

GC26 Drop-T Padlockable Single Point Locking Latch

Features


- Identical in function and dimensions to standard locking models, but allowing a padlock to be fitted
- Ideal when it is necessary to visually check that compartments have been secured, and with rental equipment when the operator prefers to fit their own standard padlock
- **This padlockable option is available with all of our regular Drop-T latches. To order, add the suffix '-PL' to the normal part number**
- Stainless models are bright-polished for good appearance, with neoprene seal under stainless 'cup' washer for weatherproofing, and rubber gasket supplied as standard.
- Lift handle to turn latch tongue. Return to centre (rest) position and fold down. To lock, turn the cast knob through 180° then depress top plunger and insert padlock through aperture. The handle now cannot be turned and the latch is held rigid.
- Latch travels 90° from centre against 'stops' and is 'handed', LH or RH, as specified, non-reversible.

Material

- 'T'-pan: Stainless steel 304 or carbon steel to CR4
- Handle, hub and support bracket: Zinc die cast

Notes

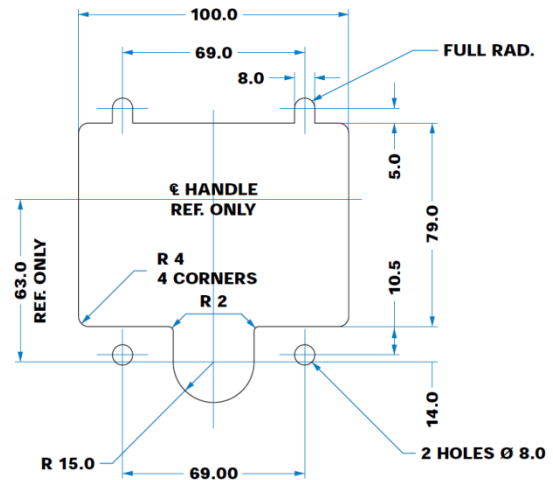
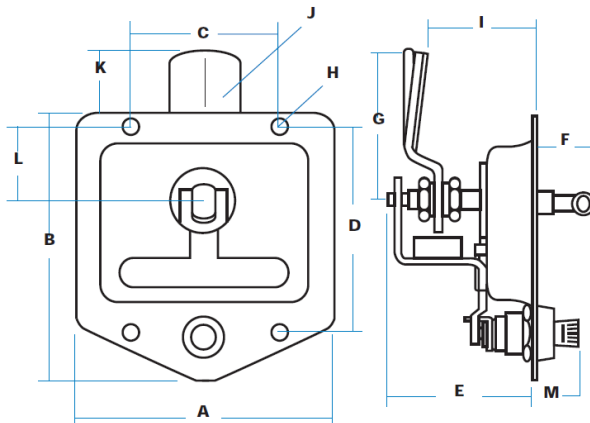
- Four holes in rim at 7.5 mm diameter for bolts or rivet. Latch bar adjusted by 2 x M10 nuts



View A shows knob in 'rest' position



View B shows the top section retracted to allow entry of padlock shackle



Part No.	A	B	C	D	E	F	G	H	I	K	L	M
Add suffix "-PL" to regular 'Drop-T' part numbers	120	125	69	95	68	30	70	7.5	43 ~ 55	30	34	25

Options & Add-Ons



GC23-G01501-SF
(Drop-T with stud-fixing, also
showing rubber gasket and die
cast support bracket)



STUD FIXING

This is an optional feature which allows the 'Drop-T' unit to be secured from beneath, with no mounting holes, screws or rivets visible from outside.


Four weld-studs (M6 x 15 mm) are fitted to the flanges in same positions as normal mounting holes, giving better appearance, more security, and preventing entry of corrosion-causing agents.

Stud-fixing is an option on all 'Drop-T' models, including mild steel and powder coated versions.

To order, add the suffix **"-SF"** to our regular part numbers.

Drop-T with straight latch bar**Suffix 'A'**

'I' dimension variable
from 29-41 mm,
'Nominal' = 35 mm


**Specify LH or RH**

G02068 = RH

G02069 = LH

Drop-T with long, straight latch bar**Suffix 'C'**

'G' dimension is
100 mm
('K' is 60 mm)


**Specify LH or RH**

G02431 = RH

G02432 = LH

Drop-T with 'cranked-up' latch bar**Suffix 'B'**

'I' dimension variable
from 21-33 mm,
'Nominal' = 30 mm


**Specify LH or RH**

G02070 = RH

G02071 = LH

Drop-T with straight, hooked latch bar**Suffix 'D'**

'G' dimension (to
hook edge) is 65 mm.

**Specify LH or RH**

G02058 = RH

G02059 = LH

ALTERNATIVE CAM PAWLS

Standard models use 'cranked-down' cam pawls but various options are illustrated. These are not reversible and cannot be changed after assembly. All are 5 mm thick with 3 mm 'V'-raised cam form.

Use the suffix letters shown to specify the cam pawl required.