

C5 Compression Latch

Sealed lever latch - 90mm size

Features

- Low profile when latched
- Easy grip adjustment
- Push button actuation
- NEMA 4 / IP65 sealing is achieved using optional flange gasket and sealing the mounting screw threads

Product Performance


- Maximum static load: 445 N

Material

- Zinc alloy, black powder coated or chrome plated and steel, zinc plated



Accessories

- Dust cover (C5-0-34682): add 2.2 to door thickness
- Flange gasket (C5-82): add 0.8 to door thickness
- Rubber bumper (C5-25-301-82)

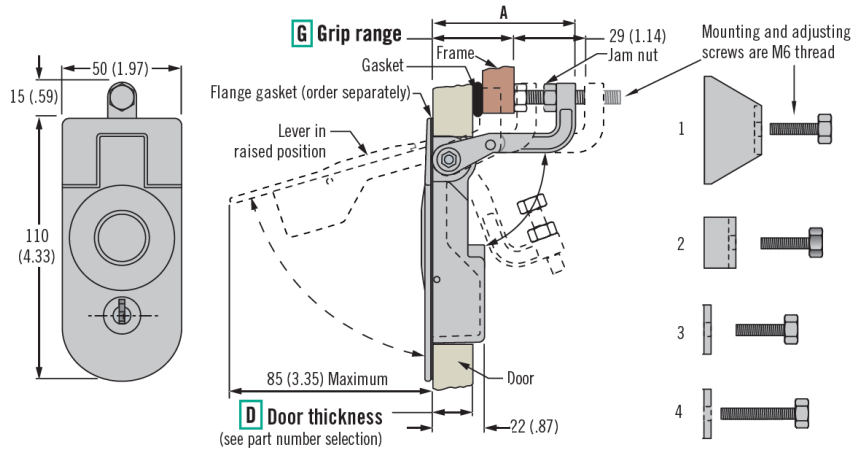

Brackets to Suit Door Thickness

L Lock styles

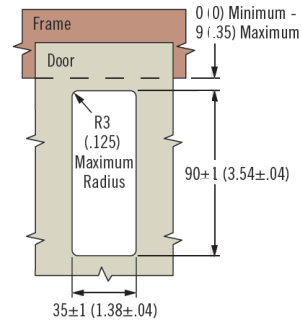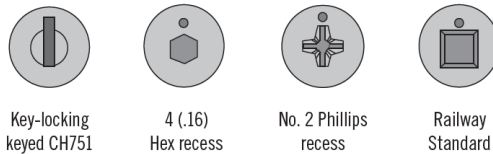

- L Lock style**
- 1 Non-locking
 - 2 Locking without dust shutter, keyed alike CH751 (two flat keys supplied)
 - 3 Locking with dust shutter, keyed alike CH751 (two flat keys supplied)
 - 9 Locking without lock core (*contact Gripwell for lock core options*)
 - 4 4 (.16) Hex recess
 - 5 No. 2 Phillips recess
 - 6 Railway standard

- D Door thickness**
- 1 1 - 11 (.04 - .43)
 - 2 11 - 21 (.43 - .83)
 - 3 21 - 31 (.83 - 1.22)
 - 4 31 - 41 (1.22 - 1.61)

- P Packaging option**
- 3 Latches are sold layer packed
Omit for individually packaged latches

C5 - L D - G 5 - P

G Grip Range		A
1	1 - 14 (.04 - .55)	Door thickness option 1 and 2 only 29 (1.14)
2	14 - 29 (.55 - 1.14)	Door thickness option 1, 2 and 3 only 44 (1.73)
3	29 - 45 (1.14 - 1.77)	60 (2.36)
4	45 - 57 (1.77 - 2.25)	72 (2.84)