

GC31 Two Way Slam System

Features

- The standard model illustrated is representative of a family of 2-way centre mechanisms, used with our end latches to provide slam action on two sides of a door or panel. Right-hand and left-hand systems are available, with many options to suit (volume) applications
- System slams shut, is opened by inside / outside handle or 'T'-key. It can be slammed even when handle is locked, due to 'free movement' allowed by link bars.
- Rotation of centre follow-bush (8 mm) withdraws link bars and slam bolts. System is handed by direction of rotation of follow bush and position of bars.



Material

- Steel, zinc plated

Notes

- System is fully plant-on. Plain end of bars should be cut and drilled as required: rivets and washers are supplied with kit. Bolt pull length adjustable.
- With end latches attached, maximum system length is 2120 mm.
- Dimensions of end latches (GD9-22387) shown separately
- Full system includes end latches (GD9-22387), striker plates (G12341), rivets (G19-7), and wave washer (G58-21)
- Special options include special link bars to order, permanently-attached inside handle, 'male drive' (8 mm square) spindle on inside/outside of latch, alternative end latches, and case hole dimensions (F = 57 mm)

Right-hand illustrated

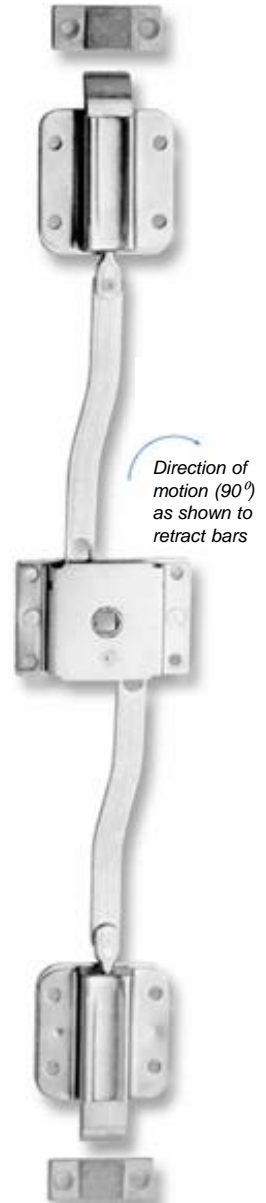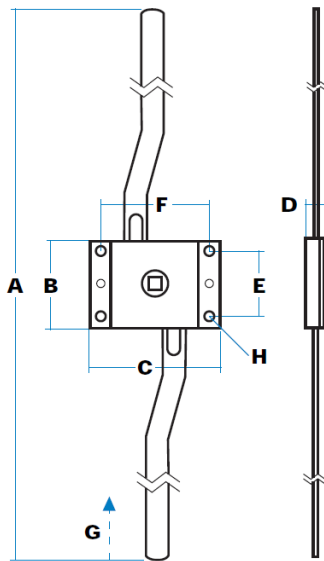

Complete right-hand slam system GC31-G02058 (includes all items shown) shown fully extended from inside

Part No.	Type	Direction	A	B	C	D	E	F	G	H
GC31-G02058	Complete System	RH	Extended: 2000	50	75	14	38	62	25	4
GC31-G02059		LH								
GC31-G02060	2 Way Centre Case Only	RH	Retracted: 1950	50	75	14	38	62	25	4
GC31-G02061		LH								