

GLL-66 Lever Latch

Features

- Used for overlay doors beyond the lower side of cabinet bottom
- Latch designed to be used on a door without knobs and handles
- Can be installed to a door with gasket
- Installation position can be adjusted (body: vertical ± 1.5 mm, counter plate: horizontal ± 1.5 mm)
- Fire proof option (UL94V-0 grade) available: **GLL-66GR**

Notes

- Ensure that the latching margin of body and counter plate is 6.5 mm

Parts Included

- Truss head tapping screw 4×12



No.	Part Name	Material	Finish / Colour
①	Latch Body	Chrome: ABS Others: PA	White, Brown, Grey, Chrome
②	Lever	Stainless Steel (SUS304)	—
③	Shaft	Steel	Coloured Zinc Chromate
④	Counter Plate	Steel (SPCC)	Nickel


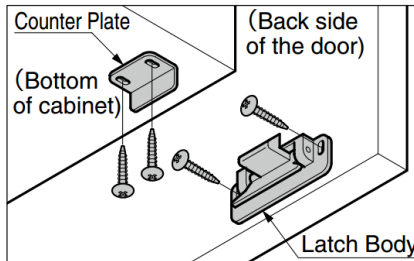


Figure on the right is for the case where the clearance between the bottom board and door is 5mm.

※marked dimension is 24 – (clearance between bottom board and door).

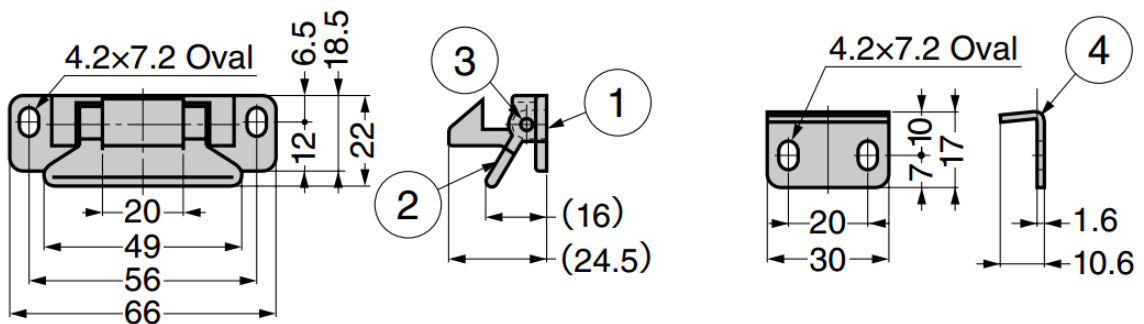

Part No.	Type	Colour	Retaining Force	
GLL-66BR	-	Brown	196 N	20 kg
GLL-66WT		White		
GLL-66CR		Chrome		
GLL-66GR	Fire Proof	Grey		