

GD11 Single Point Slam Latch

Features

- A range of compact slam latches derived from our standard end-bolts, but with direct action by knob or loop handle.
- These models are useful for seat squabs, gates and passive doors
- They are also available in stainless steel
- Dimensions same as standard end-slam latch **GD9-G22386**, bolt-spring pressure 2.5 kg

• Top Knob Latches

- Surface-mounted design with 20 mm diameter knob, at height 10 mm above bolt case
- Slam bolt projects 17 mm and withdraws 15 mm
- Bolt is non-adjustable and non-reversible

• Bottom Knob Latches


- Useful for cowls or doors which need to be operated from outside
- Knob can be removed, fitted through appropriate slot in the panel, and screwed back
- Bolt is non-adjustable and non-reversible

• Pull Handle Latches

- Standard end-latch with a 'loop' handle in 6 mm diameter bar, raised at approx. 30° to horizontal
- Slam bolt is adjustable, with projection variable from 9 mm to 16 mm, withdrawing approx. 9 mm.
- Bolt can be reversed to 'nose-up' position

Material

- Steel models: Mild steel, zinc plated
- Stainless steel models: Stainless steel, mill finish

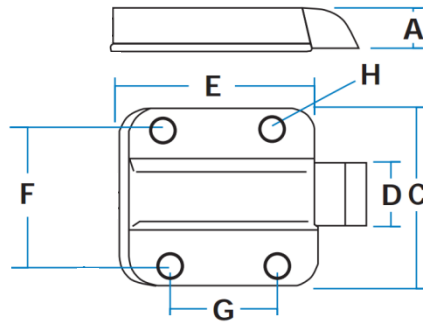

Part No.	Type	Material	A	C	D	E	F	G	H
GD11-G00279	Top knob latch, nose-up	Mild steel, zinc plated	13	57	19	62	44.5	33	ø5.5
GD11-G00279SS		Stainless steel, mill finish							
GD11-G01243	Top knob latch, nose-down	Mild steel, zinc plated							
GD11-G01243SS		Stainless steel, mill finish							
GD11-G01059	Bottom knob latch	Mild steel, zinc plated							
GD11-G01059SS		Stainless steel, mill finish							
GD11-G00028	Pull handle latch	Mild steel, zinc plated							