

## GB28 Die Cast Flush Handle Actuator

### Features

- A sophisticated design, the 'Flap' handle is easy to fit and is widely used on all types of on-road vehicles
- There are two modes of operation, either as a fully self-contained "freewheeling" handle, or with separate "isolated" lock and latch connection points
- With 'freewheeling' model, action of the key cylinder disengages latch release via connecting link. With 'isolated' model, key cylinder must be connected separately to a suitable latch.
- Turn key and lift flap to rotate connection points 'X' and 'Y'. The lock cylinder has 'private lock' movement with 45° 'lost motion'

### Material

- Black case and chromium-plated flap with 'stippled' finish, or all black (case + flap)

### Notes



- Handle is fitted from outside into panel cut-out and is secured against two threaded studs, (nuts supplied) using 'U'-bracket or inner structural member
- A moulded gasket is provided




**GB28-G25654**

(The connecting link between 'lock' and 'latch' points 'X' & 'Y' can be clearly seen)

### RIGHT-HAND HANDLE ILLUSTRATED

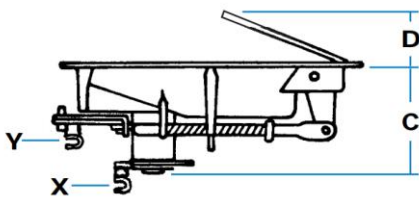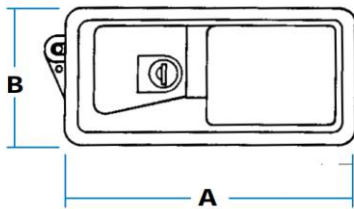

### INSIDE VIEW OF HANDLE (LH)

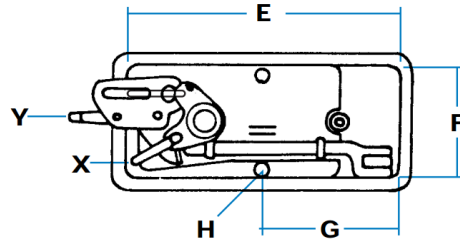

Studs are mounted in diecast bosses to clear operating plunger. Inside rim width is 6 mm. Recommended cut-out size 57 mm x 135 mm. Gasket rim width is 8 mm.

Part No.	Style	Finish	Type	A	B	C	D	E	F	G	H	X	Y
GB28-G25654	Freewheel Handle	Chrome Flap + Black Case	RH	145	67	50	32	133	55	65	10-32 UNF x 10 mm	Max travel of locking point when key is rotated: 18 mm	Max travel of latching point when flap is lifted: 15 mm
GB28-G25653		LH											
GB28-G25673		Pair											
GB28-G25654B		All Black	RH										
GB28-G25653B		LH											
GB28-G25673B		Pair											
GB28-G29344	Isolated Handle	Chrome Flap + Black Case	RH	145	67	50	32	133	55	65	10-32 UNF x 10 mm	Max travel of locking point when key is rotated: 18 mm	Max travel of latching point when flap is lifted: 15 mm
GB28-G29345		LH											
GB28-G29346		Pair											
GB28-G29344B		All Black	RH										
GB28-G29345B		LH											
GB28-G29346B		Pair											