

GD19 Anti-Burst Latch

Features

- Specially developed for agricultural tractors, construction plant and similar off-road vehicles, these latches are easily fitted to single-skin doors, with a neat, moulded trim cover for good appearance
- Latches operate from a push-button handle mounted on the outside panel, so that plunger engages with 'trigger'
- Two-stage rotary action, integral inside release, with fixing holes concealed by trim cover
- Latch slams against pin-striker, is released by exterior 'trigger' or by lifting inside handle. There is no inside locking function.
- Steel cover plate reinforces latch to increase strength rating
- 'Handing' shown for front-hinged doors, reverse handing for front-opening

Material

- Latch: Black zinc plated with moulded trim cover and inside release
- Striker: Bright zinc plated

Product Performance

- Transverse load: Excess of 8,900 N

Notes




- Attach to door edge by 2 x M6 high-tensile bolts through steel cover plate (which must be used)
- Trim cover is retained by M6 screw into threaded hole on side-face
- Striker **G01832** sold separately



View of left-hand latch from exterior, showing 'trigger' for outside release, steel cover plate and moulded trim cover



GD19-G01830
(Right-hand latch with fitted cover and integral inside handle)

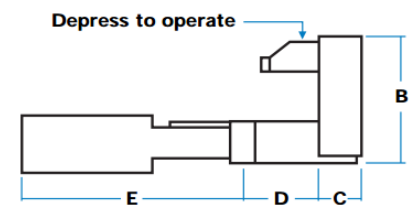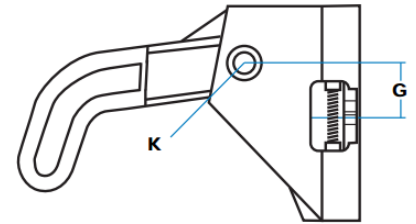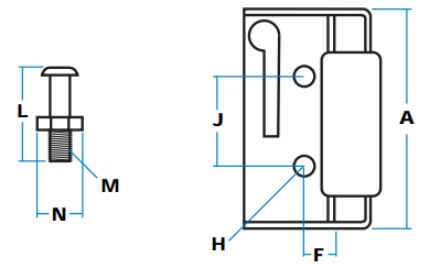

Above drawings include cover plate

Part No.	Type	A	B	C	D	E	F	G	H	J	K	L	M	N
GD19-G01830	RH	80	47	17	26	80	9	19	6	31.5	M6	41	12 x 1	16
GD19-G01831	LH													