GL-FS140 Mini Lid Stay (With Slide Lock)

Top opening · Upward opening · Swing door opening

Opening Direction	Description	Non-handed	Qty	Compression Load
 Top-opening Upward-opening Swing Door	Multi-angle Lock	Yes	1 Unit Per Door 2 Units Per Door	58.8 N/pc (6 kgf/pc)

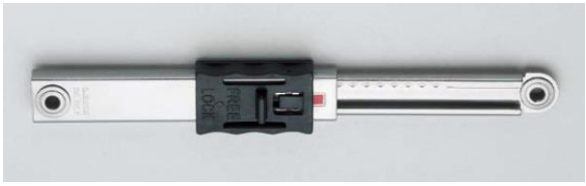

Features

- Locks the lid at multiple angles
- Sliding the lock lever in any position simultaneously locks the extension direction and compression direction
- Plastic parts and metal parts can be separated

Notes

- Do not use this product as a stopper
- Allow room for stroke when installing
- Securely fix the mounting screws with screw adhesive
- Opening angle and installation position change depending on the position of hinge centre. Determine the installation position based on the hinges used and cabinet shape
- For wooden door, use bracket **GL-FS140-BT**

Sold Separately

- Mounting bracket **GL-FS140-BT**

With bracket

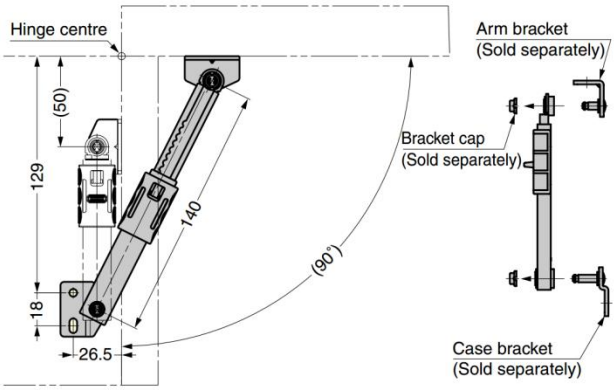

Without bracket

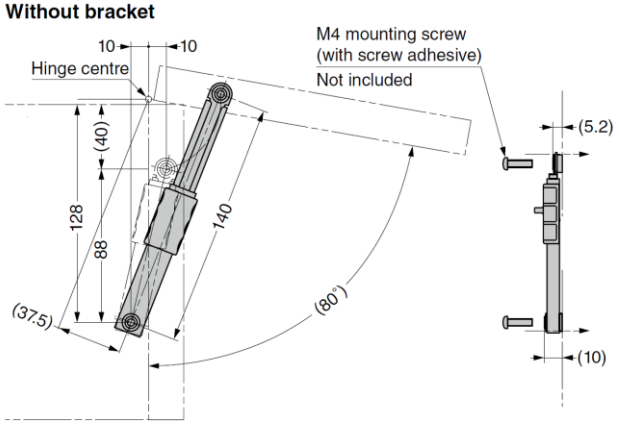

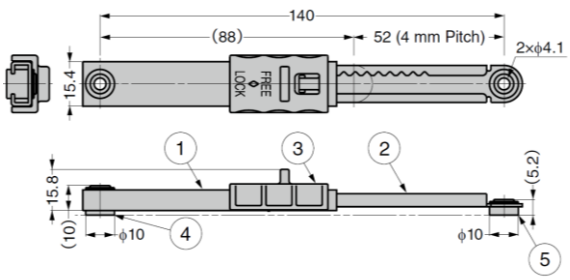

No.	Part Name	Material	Finish/Colour
①	Body	Stainless Steel (SUS304)	Barrel Polished
②	Arm		
③	Lock Lever	POM	Dark Grey
④	Case Bracket	Stainless Steel (SUS304)	–
⑤	Arm Bracket		

Part No.	Compression Load (per piece)	
GL-FS140	58.8 N	6 kg



GL-FS140-BT Bracket

- One-touch installation with the bracket cap

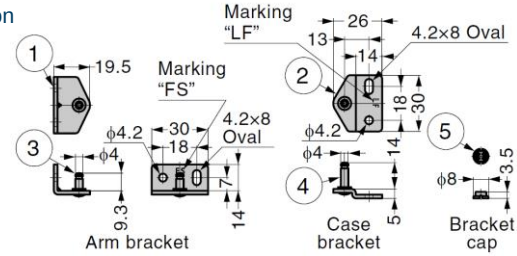

Part No.
GL-FS140-BT

No.	Part Name	Material	Finish/Colour
①	Arm Bracket	Stainless Steel (SUS304)	Barrel Polished
②	Case Bracket		
③	Shaft of Arm Bracket	Stainless Steel (SUS303)	Plain
④	Shaft of Case Bracket		
⑤	Bracket Cap	POM	Black