GLB-CV Cleanroom Lid Stay

Upward opening · Top opening

Opening Direction	Description	Non-handed	Qty	Compression Load
 Upward-opening※	Holds When Fully Opened	Yes	1 Unit Per Door 2 Units Per Door	147 N/pc (15 kgf/pc)

※Can also be used for top-opening lid, depending on installation conditions. Please confirm with actual item in detail.

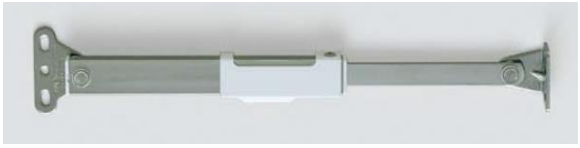

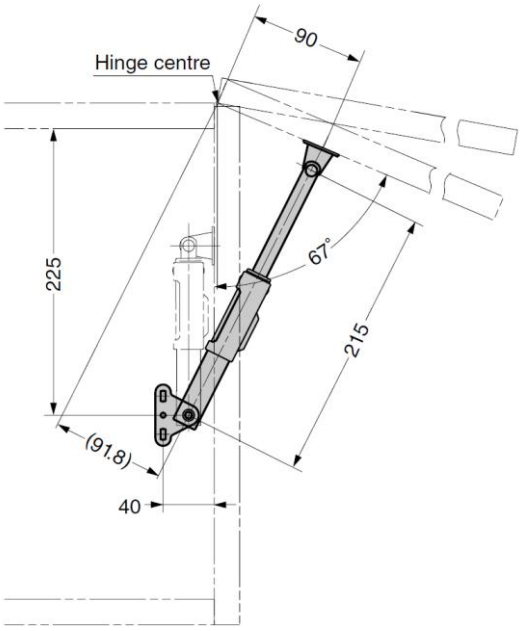

Features

- Holds the lid in fully opened position
- Slightly lift up the lid to release stopper
- Plastic parts and plastic cover at the sliding part prevent metal powder scattering due to metal-to-metal wear, suitable for clean room applications

Notes

- Do not use this product as a stopper
- Allow room for stroke depending on installation location and purpose
- Securely fix the mounting screws with screw adhesive
- Can be used singly or in pairs
- Opening angle and installation position change depending on the position of hinge centre. Determine the installation position based on the hinges used and cabinet shape.

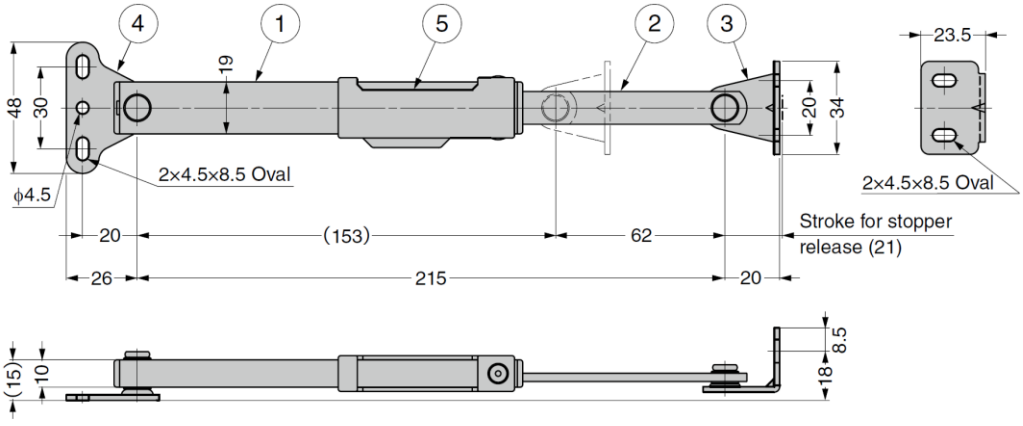

No.	Part Name	Material	Finish/Colour
①	Body	Stainless Steel (SUS304)	Polished
②	Arm		
③	Arm Bracket		
④	Case Bracket		
⑤	Cover	ABS	White

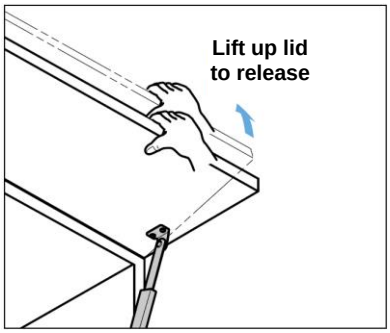

Part No.	Compression Load (per piece)	
GLB-CV215A	147 N	15 kg