

GMC-JM63G Sealed Magnetic Catch

Features



- Can be installed vertically or horizontally
- Suitable for cleanroom applications
- Body coated with resin prevents rusting, dust and spark
- Components for aluminium frame installation also available, contact Gripwell for assistance

Notes

- Do not use in contact with steam, hot water and water.
- Do not leave strongly acidic or basic detergents to avoid deteriorating
- Max. temperature: 80°C

Recommended Screws

- M4 or nominal 4 tapping screw (truss or binding head, SUS)

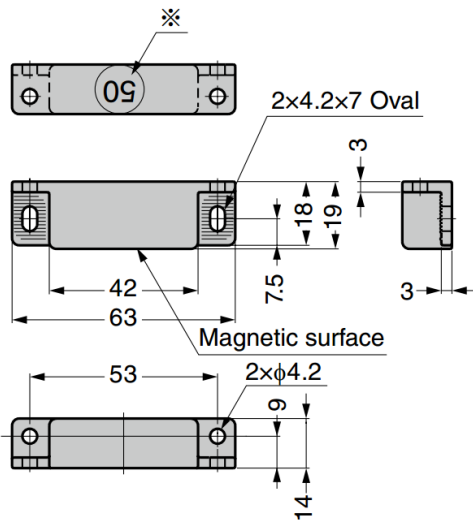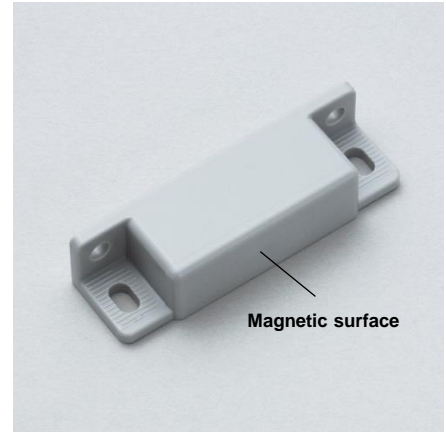

※The last 2 digits of number of the item name.

Part Name	Material	Finish / Colour
Body	POM	Grey
Yoke	Steel (SPCC)	Clear Zinc Chromate (Trivalent)
Magnet	Neodymium	-
Neoprene Sponge	Chloroprene Rubber	-
Cover	POM	Grey


Body

Part No.	Magnetic Force	
GMC-JM63G-15	14.7 N	1.5 kg
GMC-JM63G-30	29.4 N	3 kg
GMC-JM63G-50	49 N	5 kg

Counter Plates (Sold Separately)

Part No.
GMC-JMP45WT
GMC-JMP45BL
GAS-68
GMC-JM49

GAS-JM-63 Bracket

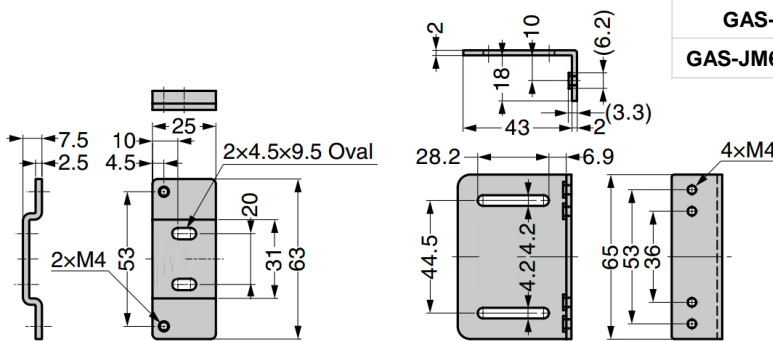

GAS-JM63G

GAS-JM63-SMC-FD

Part No.	Material	Finish
GAS-JM63G	Stainless Steel 304	Barrel Polished
GAS-JM63-SMC-FD	Stainless Steel 430	Barrel Polished