

## GHG-MPS2 Mini Detent Hinge

### Features




- Holds at 3 positions: -10°, 120° and 170°
- Can be used for horizontal or vertical applications
- Passed 40,000 life cycle test

### Notes



- Additional stopper is recommended at 0° (fully closed) and 170° (fully opened)
- For indoor use only, not suitable for wet applications
- Do not use impact screwdriver for mounting

### Recommended Screws

- Pan head screw M4 or pan head tapping screw 4

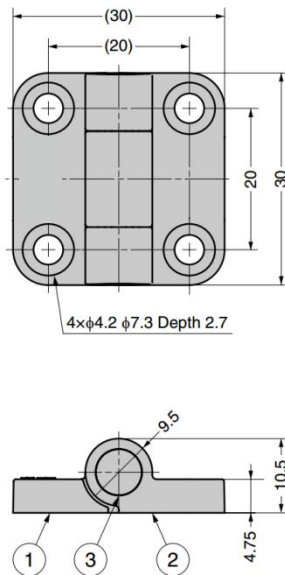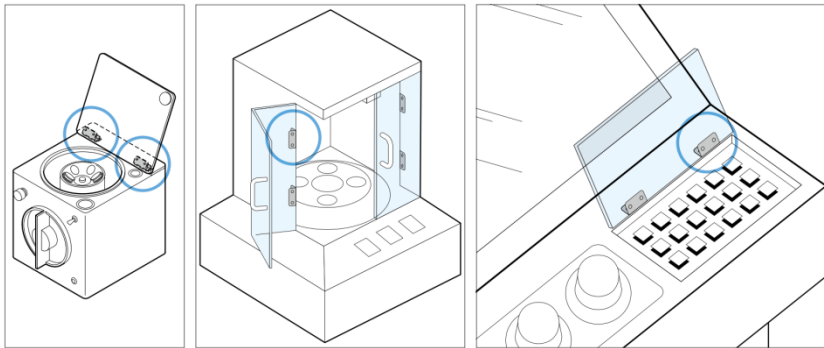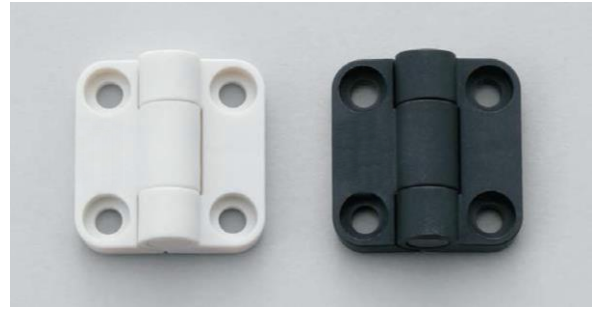

### Rotation and Detent Angle

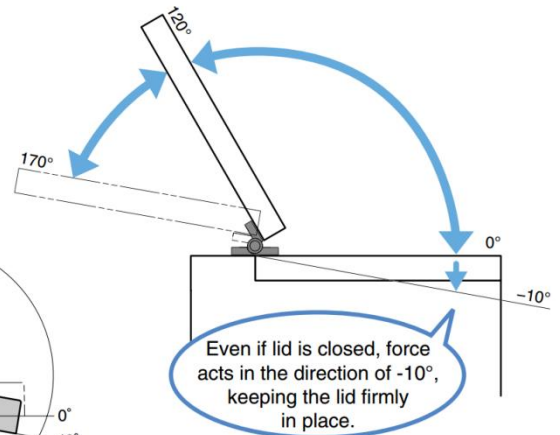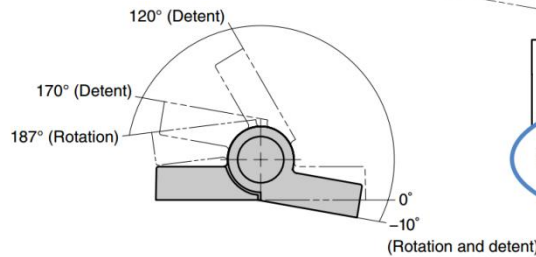

No.	Part Name	Material	Colour
①	Fixed Bracket	PBT	Black (BL), White (WT)
②	Movable Bracket		
③	Cap	ABS	

### Criterion of Door or Lid Size - Using 2 pcs Vertically

Width	Height	Weight
Max. 370	Max. 460	Max. 1.0kg

When using horizontally, design the door and lid sizes not to exceed the following torque.

Part No.	Colour	Retaining Torque -10°, 170° (per piece)		Retaining Torque 120° (per piece)	
GHG-MPS2-BL	Black	0.26 N.m	2.65 kgf.cm	0.145 N.m	1.48 kgf.cm
GHG-MPS2-WT	White				