

SR04 Sealed Rivet


Dome head · Aluminium body · Aluminium stem · Sealed
3.2 mm (1/8") - 4.8 mm (3/16")

Features


- Fully sealed and weather proof, sealed against moisture air and other contaminants
- Good hole fill and retained stem provide strong vibration resistant joints
- Higher tensile and shear strength than equivalent open end rivets

Material

- Body: Aluminium alloy, polished
- Stem: Aluminium alloy, polished

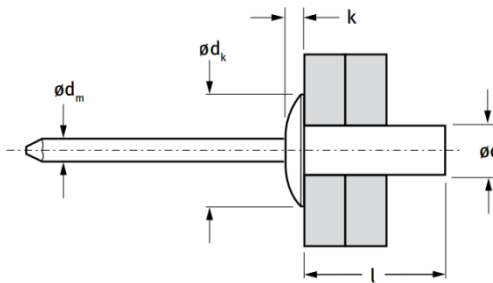

Before Placement



After Placement

Part No.	Size Ø	Grip Range		Hole Size	Ød	l	Ød _k	k	Ød _m	Shear (typical)	Tension (typical)
	nom.	min.	max.	-	±0.08	+1.0 / -0.2	-	max.	-	kN	kN
0SR04-03280	3.2 (1/8")	0.5	3.5	3.3	3.2	8.0	6.0 [±0.24]	1.4	1.8	0.45	0.49
0SR04-03295		3.5	5.5			9.5					
0SR04-04095	4.0 (5/32")	0.5	5.0	4.1	4.0	9.5	8.0 [±0.29]	1.7	2.2	0.58	0.82
0SR04-04012		5.0	8.0			12.5					
0SR04-04895	4.8 (3/16")	1.0	4.5	4.9	4.8	9.5	9.5 [±0.29]	2.0	2.65	0.90	1.12
0SR04-04811		4.5	6.5			11.5					
0SR04-04814		6.5	9.5			14.5					
0SR04-04818		9.5	13.0			18.0					



Can't find what you are looking for?

We can provide customized finishing and colouring.
Contact your nearest [Gripwell](#) team for assistance!