

## SR21 Sealed Rivet


Countersunk head · Aluminium body · Steel stem · Sealed  
3.2 mm (1/8") - 4.8 mm (3/16")

### Features


- Fully sealed and weather proof, sealed against moisture air and other contaminants
- Good hole fill and retained stem provide strong vibration resistant joints
- Higher tensile and shear strength than equivalent open end rivets

### Material

- Body: Aluminium alloy (AlMg5), polished
- Stem: Steel, phosphated

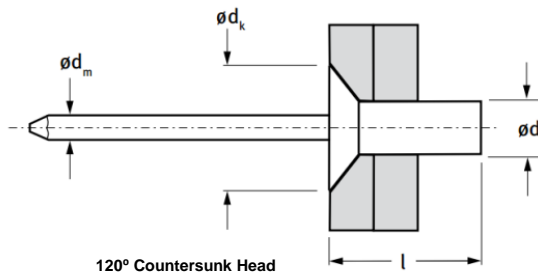

Before Placement



After Placement

Part No.	Size $\phi$	Grip Range		Hole Size	$\phi d$	l	$\phi d_k$	$\phi d_m$	Shear (typical) kN	Tension (typical) kN
		min.	max.							
0SR21-03207	3.2 (1/8")	1.5	3.5	3.3	3.2	7.5	6.0 [-0.4]	1.7	1.07	1.245
0SR21-03209		3.0	5.0			9.0				
0SR21-03210		4.5	6.5			10.5				
0SR21-04009	4.0 (5/32")	3.0	5.0	4.1	4.0	9.5	7.5 [-0.5]	2.2	1.71	2.24
0SR21-04011		4.5	6.5			11.0				
0SR21-04012		6.0	8.0			12.5				
0SR21-04809	4.8 (3/16")	2.5	4.5	4.9	4.8	9.5	9.0 [-0.5]	2.65	2.23	3.07
0SR21-04811		4.0	6.0			11.0				
0SR21-04812		5.5	7.5			12.5				
0SR21-04814		7.0	9.0			14.0				
0SR21-04815		8.5	10.5			15.5				
0SR21-04819		12.0	14.0			19.0				



### Can't find what you are looking for?

We can provide customized finishing and colouring.  
Contact your nearest [Gripwell](#) team for assistance!