

GA-S Standard Rivet


Dome head · Steel body · Steel stem
2.4 mm (3/32") - 6.4 mm (1/4")

Features

- Non-structural blind breakstem rivet designed for a wide range of applications
- Cost effective standard rivet
- Installs quickly and easily


Material

- Body: Steel, zinc plated
- Stem: Steel, zinc plated

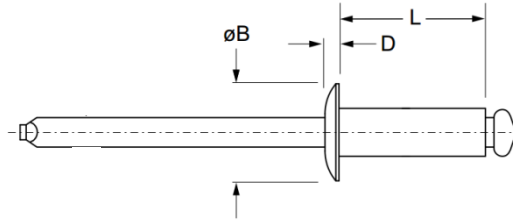

IFI Convention

Part No.	Size ø	Grip Range		Hole Size		L	øB	D	Shear (typical) kN	Tension (typical) kN
	nom.	min.	max.	min.	max.	max.	-	-		
GA-S-32	2.4 (3/32")	0.5	3.2	2.46	2.54	6.4	4.52 ~ 5.03	0.81	0.58	0.76
GA-S-34		3.2	6.4			9.5				
GA-S-36		6.4	9.6			12.7				
GA-S-41	3.2 (1/8")	0.5	1.6	3.28	3.38	5.4	6.05 ~ 6.65	1.02	1.16	1.38
GA-S-42		1.6	3.2			7.0				
GA-S-43		3.2	4.8			8.6				
GA-S-44		4.8	6.4			10.2				
GA-S-45		6.4	8.0			11.7				
GA-S-46		8.0	9.6			13.3				
GA-S-48		9.6	12.7			16.5				
GA-S-410	4.0 (5/32")	12.7	15.9	4.06	4.17	19.7	7.52 ~ 8.33	1.27	1.65	2.09
GA-S-52		0.5	3.2			7.6				
GA-S-53		3.2	4.8			9.2				
GA-S-54		4.8	6.4			10.8				
GA-S-55		6.4	8.0			12.4				
GA-S-56		8.0	9.6			14.0				
GA-S-58		9.6	12.7			17.1				
GA-S-510	4.8 (3/16")	12.7	15.9	4.88	4.98	20.3	9.04 ~ 10.03	1.52	2.40	3.02
GA-S-512		15.9	19.1			23.5				
GA-S-62		0.5	3.2			8.3				
GA-S-63		3.2	4.8			9.8				
GA-S-64		4.8	6.4			11.4				
GA-S-65		6.4	8.0			13.0				
GA-S-66		8.0	9.6			14.6				
GA-S-68	6.4 (1/4")	9.6	12.7	6.53	6.63	17.8	12.07 ~ 13.34	2.03	4.45	5.52
GA-S-610		12.7	15.9			21.0				
GA-S-612		15.9	19.1			24.1				
GA-S-614		19.1	22.2			27.3				
GA-S-616	6.4 (1/4")	22.3	25.4	6.53	6.63	30.5	12.07 ~ 13.34	2.03	4.45	5.52
GA-S-82		0.5	3.2			9.5				
GA-S-84		3.2	6.4			12.7				
GA-S-86		6.4	9.6			15.9				
GA-S-88		9.6	12.7			19.1				
GA-S-810		12.7	15.9			22.2				
GA-S-812		15.9	19.1			25.4				
GA-S-814		19.1	22.2			28.6				
GA-S-816		22.3	25.4			31.8				

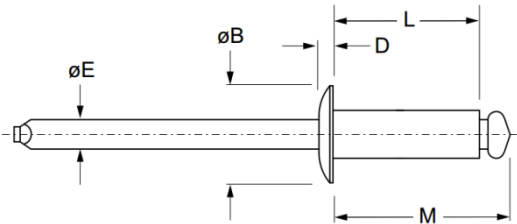

DIN Convention

Part No.	Size Ø	 Grip Range		 Hole Size		L	ØB	D	 Shear (typical) kN	 Tension (typical) kN
	nom.	min.	max.	min.	max.	max.	-	-		
GA-S-3206	3.2 (1/8")	1.0	3.0	3.3	3.4	6	5.8 ~ 6.5	1.2	1.15	1.38
GA-S-3208		3.0	5.0			8				
GA-S-3210		5.0	6.5			10				
GA-S-3212		6.5	8.5			12				
GA-S-3214		8.5	10.5			14				
GA-S-3216		10.5	12.5			16				
GA-S-4006	4.0 (5/32")	1.0	2.0	4.1	4.2	6	7.0 ~ 8.0	1.5	1.65	2.09
GA-S-4008		2.0	4.0			8				
GA-S-4010		4.0	6.0			10				
GA-S-4012		6.0	8.0			12				
GA-S-4014		8.0	10.0			14				
GA-S-4016		10.0	12.0			16				
GA-S-4018	4.8 (3/16")	12.0	14.0	4.9	5.0	18	8.5 ~ 9.5	1.6	2.40	3.02
GA-S-4020		14.0	16.0			20				
GA-S-4806		1.0	1.5			6				
GA-S-4808		1.5	3.0			8				
GA-S-4810		3.0	5.0			10				
GA-S-4812		5.0	7.0			12				
GA-S-4814		7.0	9.0			14				
GA-S-4816		9.0	11.0			16				
GA-S-4818		11.0	13.0			18				
GA-S-4820		13.0	15.0			20				
GA-S-4822	6.4 (1/4")	15.0	17.0	6.5	6.6	22	11.5 ~ 13.0	2.2	4.45	5.50
GA-S-4825		17.0	20.0			25				
GA-S-4828		20.0	23.0			28				
GA-S-4830		23.0	25.0			30				
GA-S-6412		3.5	6.0			12				
GA-S-6415		6.0	9.0			15				
GA-S-6418	6.4 (1/4")	9.0	11.5	6.5	6.6	18	11.5 ~ 13.0	2.2	4.45	5.50
GA-S-6422		11.5	15.5			22				
GA-S-6425		15.5	18.5			25				
GA-S-6430		18.5	23.5			30				



Can't find what you are looking for?

We can provide customized finishing and colouring.
Contact your nearest [Gripwell](#) team for assistance!