

GWSSMG Multi Grip Stainless Steel 304 Rivet


Dome head · Stainless steel 304 body · Stainless steel 304 stem · Multi-grip
3.2 mm (1/8") - 4.8 mm (3/16")

Features


- Multi-grip capability accommodates wide variations in material thickness
- Good hole fill provides strong, vibration resistant joints
- Compensates for irregular, oversized, slotted or misaligned holes
- Can stop sheet movement in non-standard holes
- Retained stem avoids damage, electrical problems or rattling caused by loose stems

Material

- Body: Stainless steel 304
- Stem: Stainless steel 304

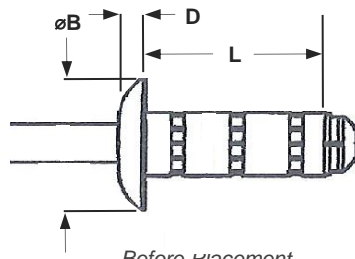

Before Placement

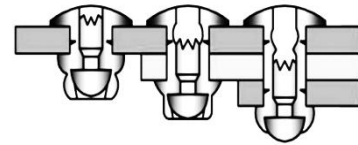

After Placement

| Part No. | Size ø | Grip Range | | Hole Size | | L | øB | D | Shear (typical) kN | Tension (typical) kN |
|-------------|----------------|------------|------|-----------|------|-----|-----|-----|--------------------------|----------------------------|
| | | nom. | min. | max. | min. | | | | | |
| GWSSMG-0408 | 3.2 (1/8") | | 1.0 | 3.2 | 3.3 | 3.4 | 6.4 | 1.2 | 1.44 | 1.98 |
| GWSSMG-0410 | | | 1.0 | 4.8 | | | | | | |
| GWSSMG-0412 | | | 1.6 | 6.4 | | | | | | |
| GWSSMG-0414 | | | 3.2 | 8.0 | | | | | | |
| GWSSMG-0416 | | | 4.8 | 9.6 | | | | | | |
| GWSSMG-0418 | | | 6.4 | 11.2 | | | | | | |
| GWSSMG-0508 | 4.0 (5/32") | | 1.2 | 3.2 | 4.1 | 4.2 | 7.9 | 1.5 | 2.42 | 3.25 |
| GWSSMG-0510 | | | 1.6 | 4.8 | | | | | | |
| GWSSMG-0512 | | | 1.6 | 6.4 | | | | | | |
| GWSSMG-0514 | | | 3.2 | 8.0 | | | | | | |
| GWSSMG-0516 | | | 4.8 | 9.6 | | | | | | |
| GWSSMG-0518 | | | 6.4 | 11.2 | | | | | | |
| GWSSMG-0520 | | 8.0 | 12.7 | | | | | | | |
| GWSSMG-0608 | 4.8 (3/16") | | 1.6 | 3.2 | 4.9 | 5.0 | 9.5 | 1.6 | 4.00 | 4.49 |
| GWSSMG-0610 | | | 1.6 | 4.8 | | | | | | |
| GWSSMG-0612 | | | 1.6 | 6.4 | | | | | | |
| GWSSMG-0614 | | | 3.2 | 8.0 | | | | | | |
| GWSSMG-0616 | | | 4.8 | 9.6 | | | | | | |
| GWSSMG-0618 | | | 6.4 | 11.2 | | | | | | |
| GWSSMG-0620 | | | 8.0 | 12.7 | | | | | | |
| GWSSMG-0622 | | | 9.6 | 14.3 | | | | | | |
| GWSSMG-0624 | | | 12.7 | 17.5 | | | | | | |