

G4339/G4564 High Strength Rivet


Dome head · Stainless steel body · Stainless steel stem
4.8 mm (3/16") - 6.4 mm (1/4")

Features


- High performance structural breakstem fastener
- High shear and tensile strength provides strong, vibration resistant joints
- Spreads the tail bearing load/clamp load on the rear sheet making it ideal for use in thin sheet materials
- Retained stem avoids damage, electrical problems or rattling caused by loose stems

Material

- Body: Stainless steel 304
- Stem: Stainless steel 304

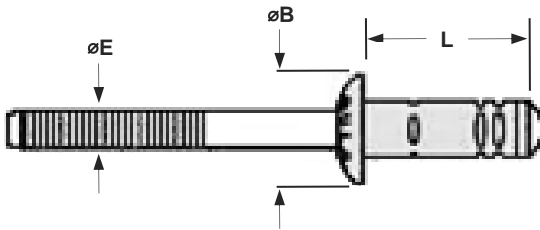

Before Placement



After Placement

Part No.	Size ø	Grip Range		Hole Size		L	øB	øE	Shear (typical) kN	Tension (typical) kN
		nom.	min.	max.	min.					
G4564-26	4.8 (3/16")		1.5	3.5	5.0	5.2	9.5	3.2	4.40	5.40
G4564-27			3.5	5.5						
G4539-36			5.5	7.5						
G4539-37	6.4 (1/4")		2.0	4.0	6.7	6.9	13.0	4.25	8.00	8.80
G4539-38			4.0	6.0						
G4539-39			6.0	8.0						
G4539-40			8.0	10.5						
G4539-41			10.5	12.5						
G4539-42			12.5	14.5						



Can't find what you are looking for?

We can provide customized finishing and colouring.
Contact your nearest [Gripwell](#) team for assistance!