

2691 Avdelok



Stainless steel · Brazier head
4.8 mm (3/16") - 9.6 mm (3/8")

Features


- High shear strength for high strength assembly
- High controlled clamp provides excellent vibration resistance
- Quick to install across a wide range of applications
- Easy to inspect for tampering
- High security tamper resistance - TIR approved
- Robust and rugged installation tools
- Stainless steel material for better corrosion resistance

Material


- Pin: Stainless steel 304, natural
- Collar: Stainless steel 430, zinc plated, clear trivalent passivated


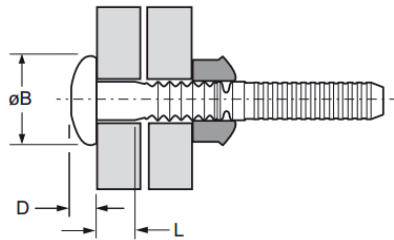


Full Collar




Flanged Collar


Part No. Pin	Size ø	 w. Full Collar		 Hole Size	L	øB	D	Part No. Full Collar		Part No. Flanged Collar ⁽¹⁾		
	nom.	min.	max.					S max.	øT max.	S max.	øT max.	U nom.
02691-00602	4.8 (3/16")	1.57	4.75	5.0	1.57	10.0	3.4	02605-70600 9.4 8.0		02648-70600 10.2 9.9 0.76		
02691-00603		3.18	6.35		3.18							
02691-00604		4.75	7.92		4.75							
02691-00605		6.35	9.53		6.35							
02691-00606		7.92	11.10		7.92							
02691-00607		9.53	12.70		9.53							
02691-00608		11.10	14.27		11.10							
02691-00609		12.70	15.88		12.70							
02691-00610		14.27	17.45		14.27							
02691-00611		15.88	19.05		15.88							
02691-00612		17.45	20.62		17.45							
02691-00613		19.05	22.23		19.05							
02691-00614		20.62	23.80		20.62							
02691-00615		22.23	25.40		22.23							
02691-00616		23.80	26.97		23.80							
02691-00617		25.40	28.58		25.40							
02691-00618		26.97	30.15		26.97							
02691-00619		28.58	31.75		28.58							
02691-00620		30.15	33.32		30.15							


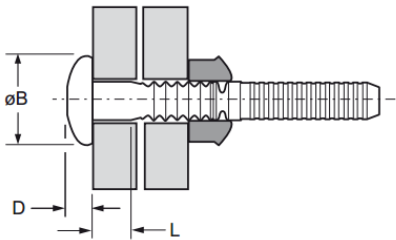


Full Collar




Flanged Collar

Part No. Pin	Size ø	 w. Full Collar		 Hole Size	L	øB	D	Part No. Full Collar		Part No. Flanged Collar ⁽¹⁾		
		nom.	min. max.					S max.	øT max.	S max.	øT max.	U nom.
02691-00802	6.4 (1/4")	1.57	4.75	6.6	1.57	13.4	4.1	02605-70800 12.2 10.6	02648-70800 13.2 13.1 0.94			
02691-00803		3.18	6.35		3.18							
02691-00804		4.75	7.92		4.75							
02691-00805		6.35	9.53		6.35							
02691-00806		7.92	11.10		7.92							
02691-00807		9.53	12.70		9.53							
02691-00808		11.10	14.27		11.10							
02691-00809		12.70	15.88		12.70							
02691-00810		14.27	17.45		14.27							
02691-00811		15.88	19.05		15.88							
02691-00812		17.45	20.62		17.45							
02691-00813		19.05	22.23		19.05							
02691-00814		20.62	23.80		20.62							
02691-00815		22.23	25.40		22.23							
02691-00816		23.80	26.97		23.80							
02691-00818		26.97	30.15		26.97							
02691-00820		30.15	33.32		30.15							
02691-01004	8.0 (5/16")	3.18	9.53	8.2	3.18	16.7	5.5	02605-71000 15.5 13.3	N/A			
02691-01006		6.35	12.70		6.35							
02691-01008		9.53	15.88		9.53							
02691-01010		12.70	19.05		12.70							
02691-01012		15.88	22.23		15.88							
02691-01014		19.05	25.40		19.05							
02691-01016		22.23	28.58		22.23							
02691-01018		25.40	31.75		25.40							
02691-01020		28.58	34.93		28.58							
02691-01022		31.75	38.10		31.75							
02691-01024		34.93	41.28		34.93							
02691-01026		38.10	44.45		38.10							
02691-01028		41.28	47.63		41.28							
02691-01030		44.45	50.80		44.45							
02691-01032		47.63	53.98		47.63							

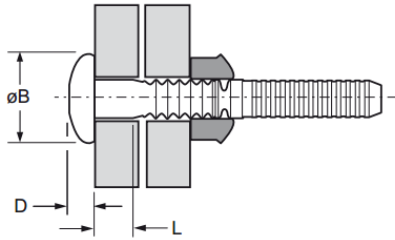

Full Collar




Flanged Collar

Part No. Pin	Size Ø	w. Full Collar		Hole Size	L	ØB	D	Part No. Full Collar		Part No. Flanged Collar ⁽¹⁾		
		nom.	min.	max.		max.	max.	S max.	ØT max.	S max.	ØT max.	U nom.
02691-01204	9.6 (3/8")	3.18	9.53	9.8	3.18	20.0	6.7	02605-71200 18.6 15.5	N/A			
02691-01206		6.35	12.70		6.35							
02691-01208		9.53	15.88		9.53							
02691-01210		12.70	19.05		12.70							
02691-01212		15.88	22.23		15.88							
02691-01214		19.05	25.40		19.05							
02691-01216		22.23	28.58		22.23							
02691-01218		25.40	31.75		25.40							
02691-01220		28.58	34.93		28.58							
02691-01222		31.75	38.10		31.75							
02691-01224		34.93	41.28		34.93							
02691-01226		38.10	44.45		38.10							
02691-01228		41.28	47.63		41.28							
02691-01230		44.45	50.80		44.45							
02691-01232		47.63	53.98		47.63							

Size Ø	Shear ⁽²⁾	Tension ⁽²⁾
nom.	kN	kN
4.8	7.79	9.26
6.4	14.55	17.71
8.0	22.24	29.80
9.6	31.58	37.81

- 1) Flanged collars are used in applications where the hole on the collar side of the application is oversize or is slotted for alignment purposes. To determine what length of pin is required, add dimension U to the thickness of material being fastened.
- 2) These figures represent minimum fastener shear and tensile strength values with the use of a full or flanged collar.

Typical placing sequence (Brazier head style shown for illustration):

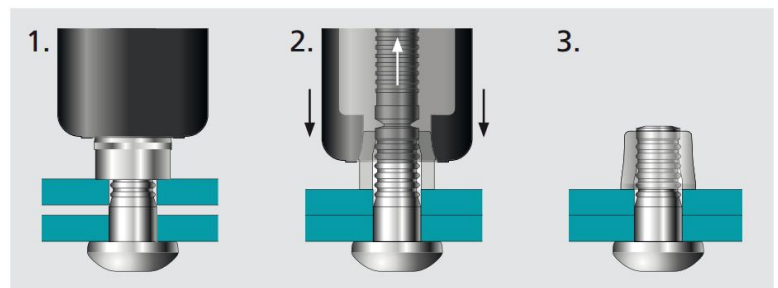


Assembly Applications

- Commercial vehicles
- Truck & trailer
- Heating systems
- Steel construction
- Solar panels
- Railway
- Mining

Heating systems



Commercial vehicles

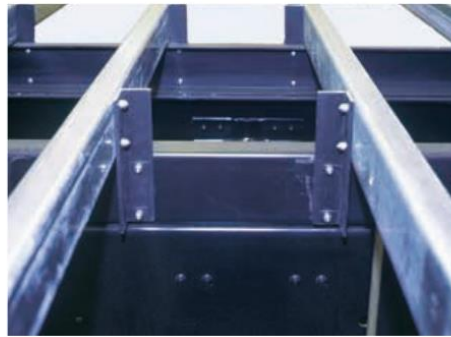

Ventilator frame



Car seat

