


GFDP40V Stackable Partition Door System


STACKABLE DOOR SYSTEMS

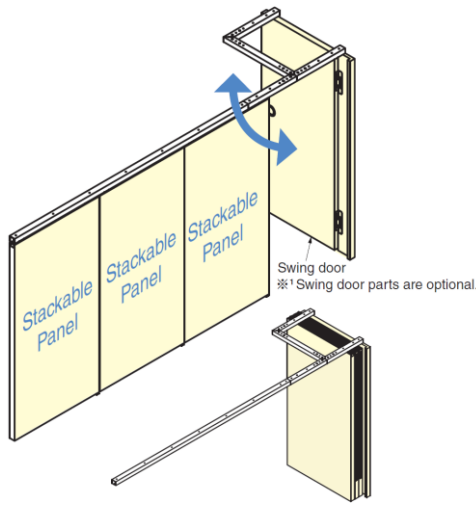

Perpendicular Stacking	
Roller	Recessed Mount
Door Weight	Max. 40 kg/Door
Door Thickness	34 - 40 mm
Door Width	Max. 900 mm (Swing Door)
	700 - 900 mm (Stackable Panel)
Door Height	Max. 2500 mm


Features

- Perpendicular stacking partition door system
- Easy door installation - simply hang the door onto the rollers
- No bottom rail for clean appearance
- Can be used for swing door applications with optional parts


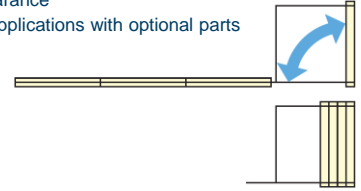


Door Preparation


Stackable Panel (SP)

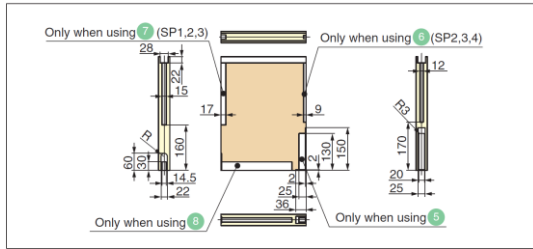

For Door Stopper 11 (SD)

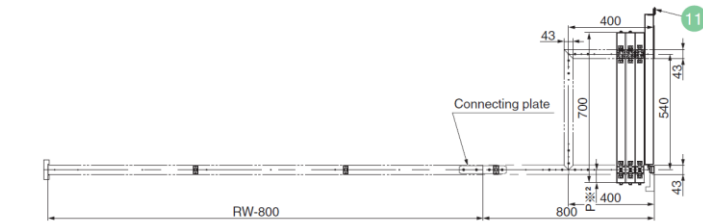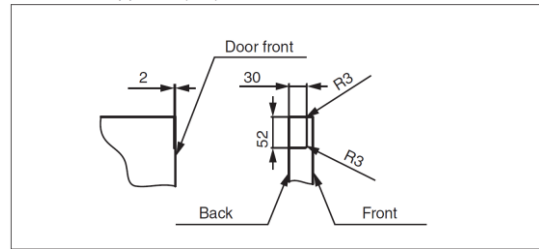

※²
If panel width PW ≤ 780, P = 60.
If 780 < panel width PW ≤ 900,
P ≥ panel width PW - 720.

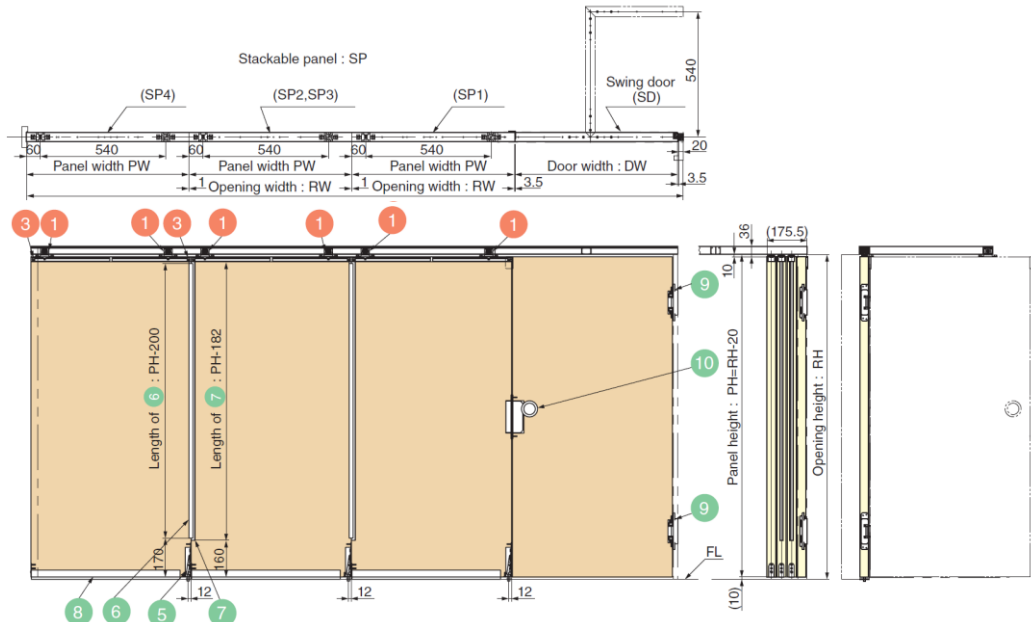

GFDP40 Stackable Partition Door System



*Re-model
at will*

Create a versatile room with movable partitions.

Perpendicular stacking



Parallel stacking





From Terrace Musashino Nakacho Model Room
(Kajima Corporation)


	Parallel Stacking (GFDP40P)	Perpendicular Stacking (GFDP40V)
Door Weight	Max. 40 kg/Door	
Door Thickness	34 - 40 mm	
Door Width	Stackable Door : 700 - 1000 mm Sliding Panel : 700 - 1300 mm	Swing Door : Max. 900 mm Stackable Panel : 700 - 900 mm
Door Height	Max. 2500 mm	
Specification	☐ For 3 - 4 Panels	

GFDP Stackable Partition Door System Check Points For Installation


① Make sure that the ceiling is strong enough to support a load of 160 kg (in the stacking part of the rail).

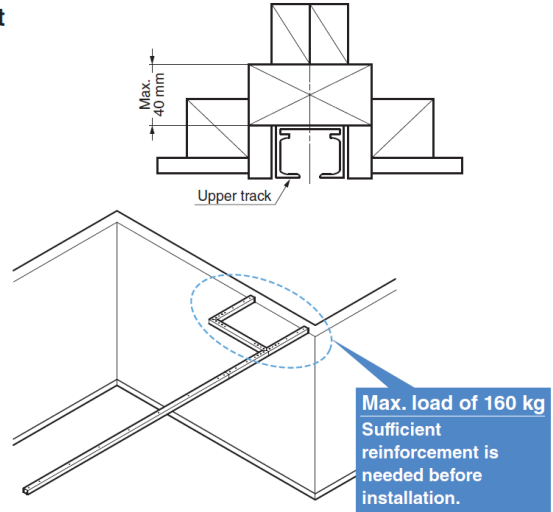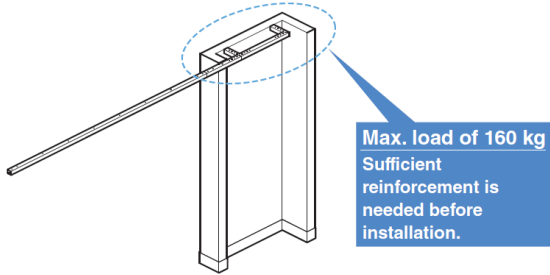


② Check the ceiling for sag and floor for wrap.

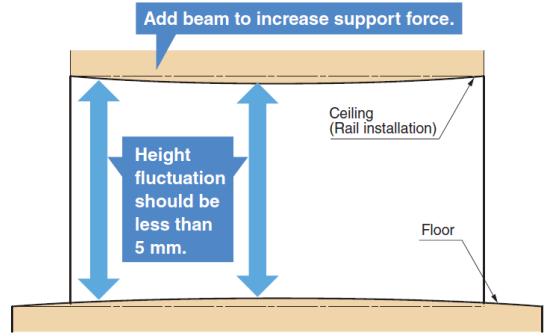

③ Process when recessing the rail.

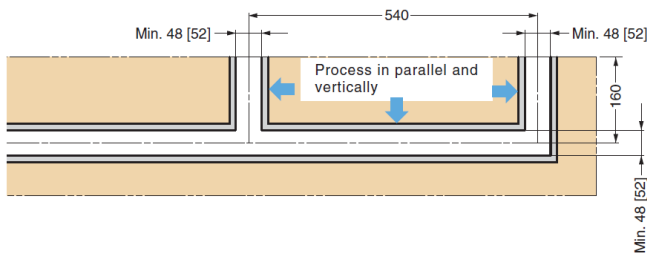


GFDP40P

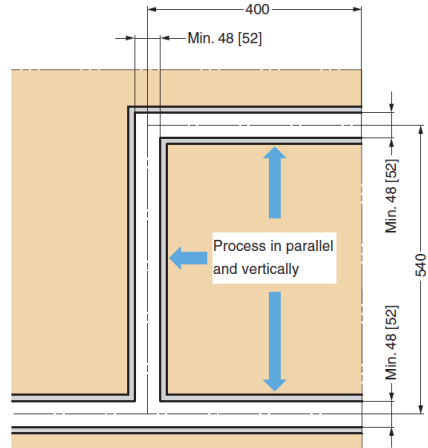

GFDP40V

Dimension in [] denoted when cloth is added.



When processing without gap between ceiling face and rail

- At first, install the rail to reinforcement material behind the ceiling.
- Then, fix the ceiling face to meet rail mount dimensions.

