

GHC-3051 Sliding Door Latch

Features


- Recessed latch handle for wooden sliding doors
- 4 bases available
- Possible to install the backset at any position between 30 mm and 51 mm from the door edge
- Ideal for narrow lock stile door
- Applicable door thickness: 35 - 45 mm. 3 different lengths of spindles and 2 different lengths of screws are included
- Non-handed

Notes

- Before inserting the base to the door, please follow recommended steps ①②③
- Latch can work only when door is completely closed

Parts Included

- Spindles $\phi 4 \times 35$, $\phi 4 \times 39$, $\phi 4 \times 43$ (SWCH)
- Countersunk head tapping screw 3.5×25 (SUS) for strike & latch body
- Countersunk head screw $M4 \times 20$, $M4 \times 25$ (SUS) for square handle

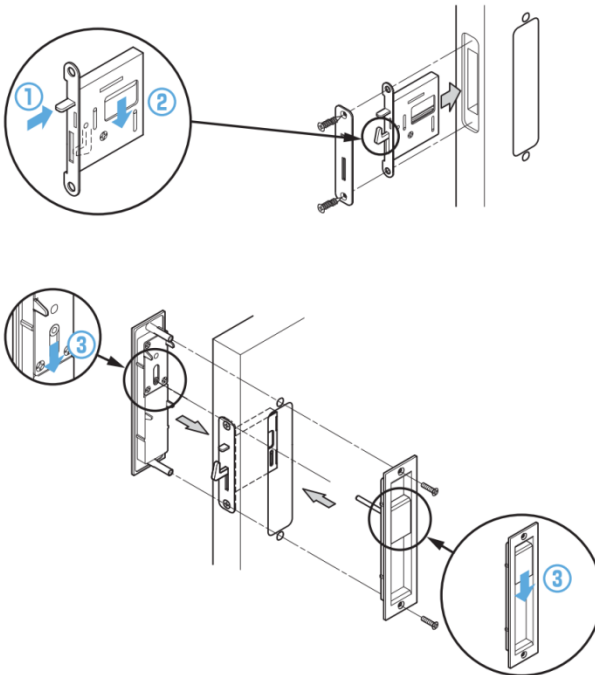

Privacy (PRV) Indicator (IND) Cylinder Lock (CLD) Double sided slide (DSL)

The opposite side of every model has a slide handle as shown for the "DSL" type (above).

No.	Part Name	Material	Finish
①	Base	Zinc Alloy	Nickel
②	Knob	Zinc Alloy	Nickel
③	Latch Body	Steel (SECC)	Plain
④	Spindle	Steel (SWCH)	Chromate
⑤	Trigger	Stainless Steel (SUS304)	Polished
⑥	Bolt	Stainless Steel (SUS304)	Polished
⑦	Front Plate (Latch)	Stainless Steel (SUS304)	Satin
⑧	Strike	Steel (SECC)	Plain
⑨	Front Plate (Strike)	Stainless Steel (SUS304)	Satin

