
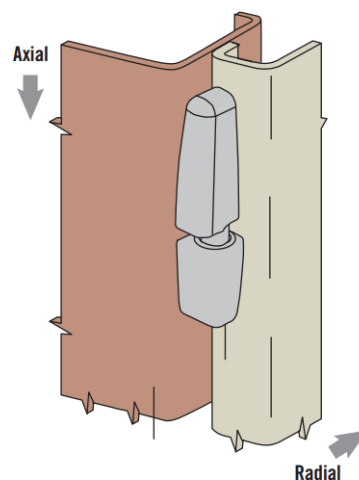


- Allows for quick, easy door removal
- Door can also be permanently installed

- Radial load maximum static load:
 - Zinc alloy: 1,300 N
 - Stainless steel: 3,000 N
- Axial load maximum static load:
 - Zinc alloy: 2,200 N
 - Stainless steel: 5,000 N

- Zinc alloy, chrome plated, powder coated or stainless steel

- Screws not supplied
- Attach hinge with four M5 x 0.8
- Maximum screw length = door (or frame) thickness + 10

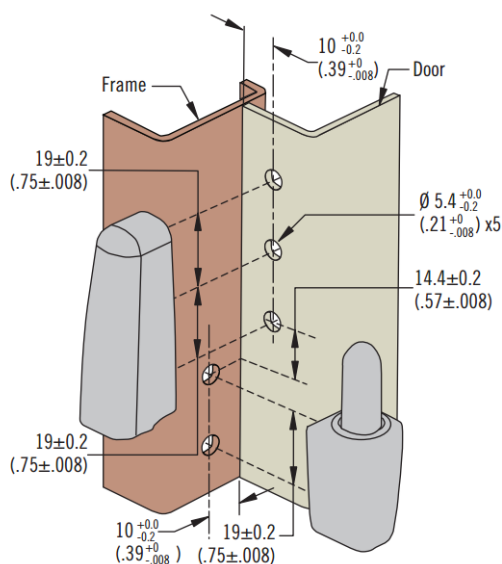

Material & Finish	Part Number
Zinc alloy, bright chrome	96-MA-80-10
Zinc alloy, black powder coated	96-MA-80-50
Zinc alloy, satin chrome	96-MA-80-20
Stainless steel, polished	96-MA-80-24