

96-MA Lift-off Hinge

Offset · Zinc and Stainless Steel

Features

- Allows for quick, easy door removal
- Door can also be permanently installed

Product Performance

- Radial load maximum static load:
 - Zinc alloy: 1,300 N
 - Stainless steel: 3,000 N
- Axial load maximum static load:
 - Zinc alloy: 2,200 N
 - Stainless steel: 5,000 N

Material


- Zinc alloy, chrome plated, powder coated or stainless steel

Installation Notes



- Screws not supplied
- Attach hinge with four M5 x 0.8
- Maximum screw length = door (or frame) thickness + 10



Type A

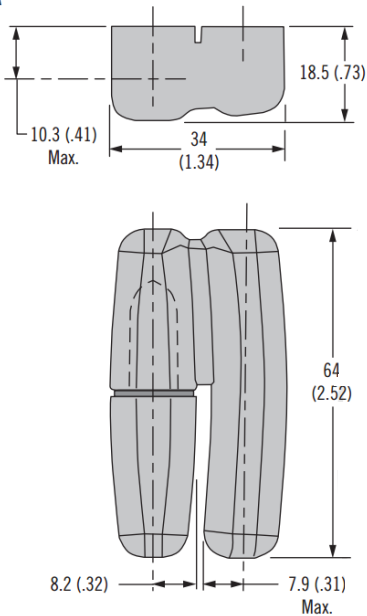


Type B

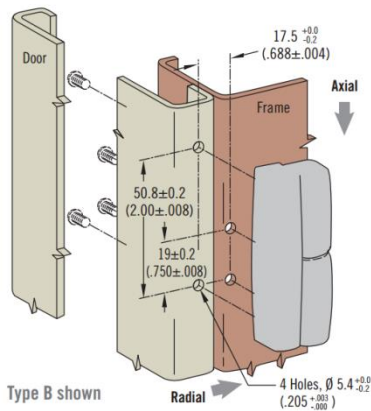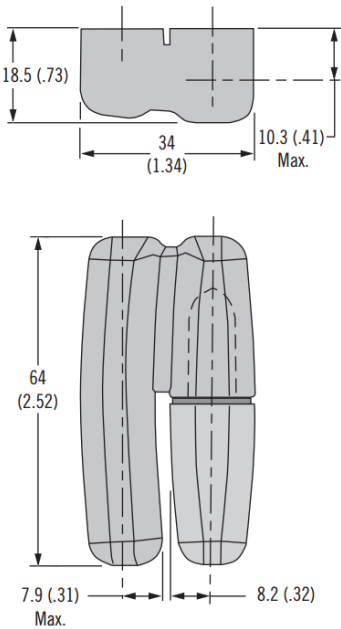

For Lift-Off Mounting

For Non Lift-Off Mounting

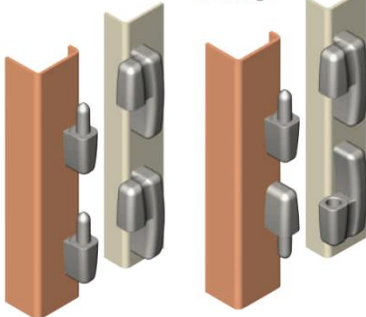

Material & Finish	Part Number	
	Type A	Type B
Zinc alloy, bright chrome	96-MA-8A-10	96-MA-8B-10
Zinc alloy, black powder coated	96-MA-8A-50	96-MA-8B-50
Zinc alloy, satin chrome	96-MA-8A-20	96-MA-8B-20
Stainless steel, polished	96-MA-8A-24	96-MA-8B-24

