

GAK-60 Push Knob Latch

Features

- Prevents unexpected open
- Easy operation, just pull the lever to open and automatically latched when closing
- Can be installed both on top board and bottom board

Recommended Application



- Door thickness: min. 18 mm
- Door size:
 - H (max. 700 mm) × W (max. 500 mm)
 - Thickness of top board or bottom board: 25 mm (use space in case 20 mm or 15 mm)
- *25 mm thick board: screw for mounting counter plates = 3.5×15
- *20 mm or 15 mm thick board: screw for mounting counter plates = 3.5×20

Parts Included


- Binding head tapping screw 3.5×15, 3.5×20, 4.0×15 (SUS)

Sold Separately

- Cover for the cut end of board: **GAK-C60** (below)

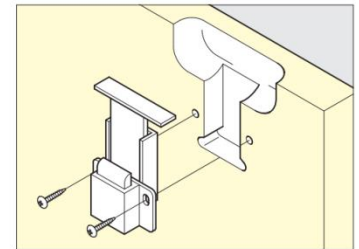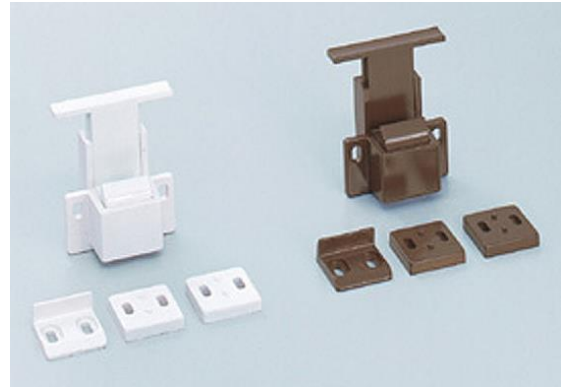


Bore Dimensions (Door)

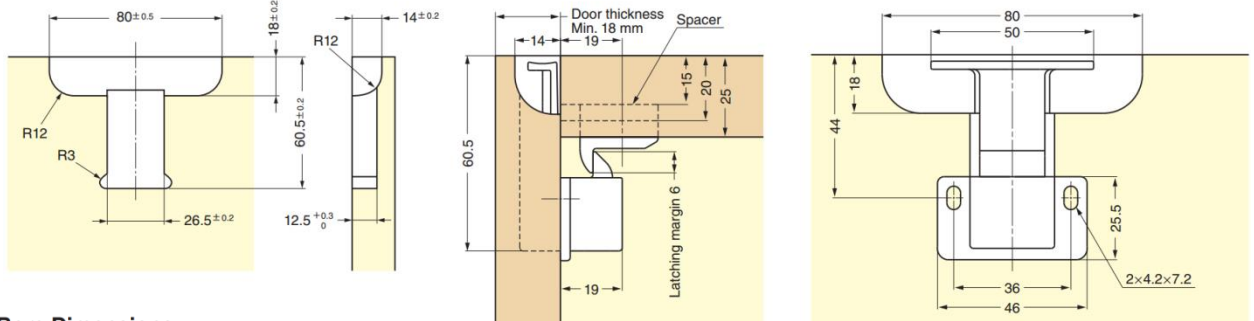

Bore Dimensions

(Using the Cover for the Cut End of Board)

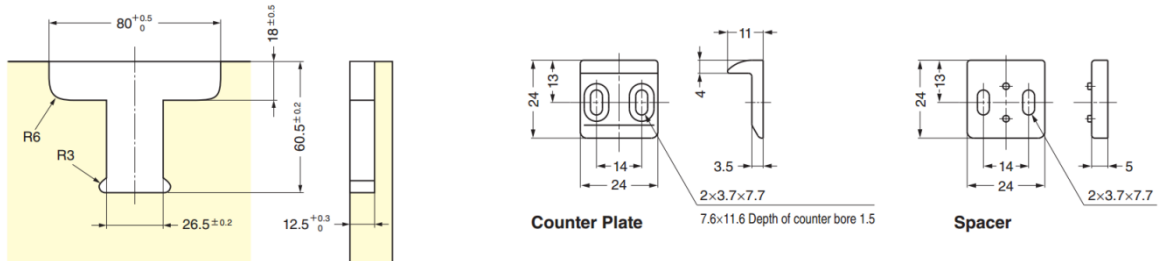

Part No.	Colour	Retaining Force	
GAK-60WT	White	196 N	20 kg
GAK-60BR	Brown		

Part Name	Material	Colour
Latch Body	ABS/Polyacetal (POM)	White, Brown
Counter Plate	Polyamide (PA)	White, Brown
Spacer	Polyamide (PA)	White, Brown

GAK-C60 Cover For Cut End of Board

Parts Included

- Countersunk head tapping screw 3×10 (SUS)

Part No.	Colour
GAK-C60WT	White
GAK-C60BR	Brown

