



GLC-65A Flush Slam Latch

Features

- Pull paddle handle to open
- Door will be latched when closed
- Mounting screws are concealed from door surface
- Easy installation, insert the latch body through cut out section and screw-on the back plate
- Latching margin: 5 mm (small R is required at the corners on the frame side)


Parts Included

- Pan head screws M4 x 8 (SUS)



No.	Part Name	Material	Finish / Colour
①	Body	Aluminium Alloy	Silver
②	Latch Bolt	POM	White
③	Cover	Stainless Steel (SUS304)	Barrel Polished
④	Back plate		

Part No.	Door Thickness
GLC-65A	2 ~ 3.2

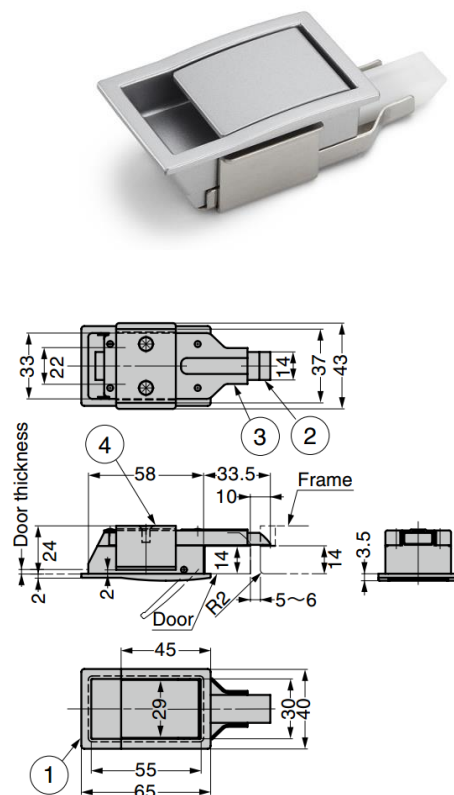



GLC-48 Flush Slam Latch

Features

- Door will be latched when closed
- Low profile eliminates worries about protruding to the inside of equipment
- Mounting screws are concealed from door surface
- UL94V-0 rated flame retardant material
- Non-handed, can be installed on left or right side
- Easy installation, insert the latch body through cut out section and screw-on the back plate

Parts Included

- Pan head screws M4 x 10 (SUS)

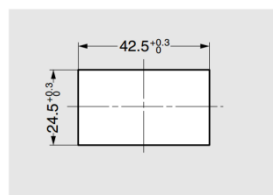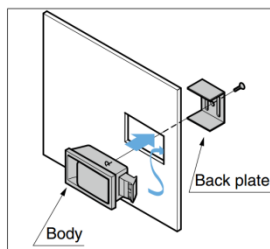

No.	Part Name	Material	Finish / Colour
①	Body	Stainless Steel (SUS304)	Barrel Polished
②	Handle		
③	Latch	PBT (Glass Reinforced)	White
④	Back Plate	Stainless Steel (SUS304)	Barrel Polished

Part No.	A	Total Catch Size B	Door Thickness C
GLC-48-3	3.5	3.2	1 ~ 1.6
GLC-48-5	5.1	4.6	1 ~ 2.3

