

GTLP Push Knob Latch


Features

- Safe and smart design: door will be locked when knob is pushed in
- Keeps the door closed due to the spring loaded latch
- Flexible to suit door thickness by adjusting screw
- Can be used for overlay and inset door (door thickness: 19 - 30 mm)
- 3 point option for tall cabinet doors also available, contact Gripwell for assistance


Parts Included

- Screw to install latch body: Pan-head tapping screw 3×20 (SUS)
- Screw to install counter plate: Pan-head tapping screw 3×16 (SUS)
- Screw to adjust door thickness: M4x24, M4x30




Parts Structure

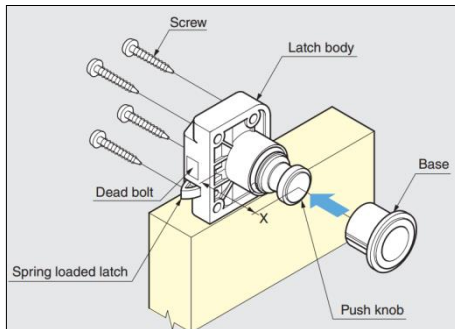

Bore Dimensions (Door)

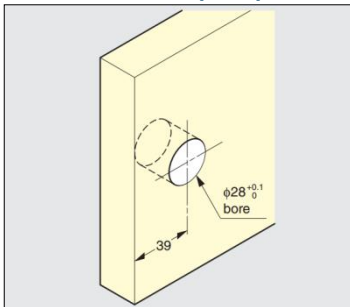

Dimension above is for inset door

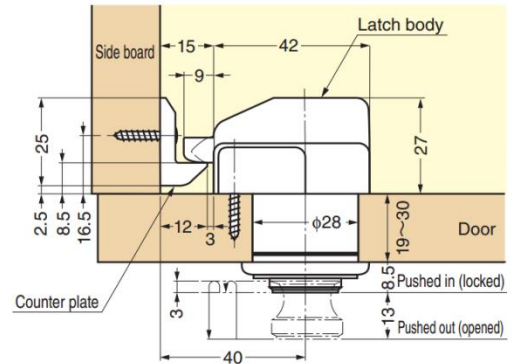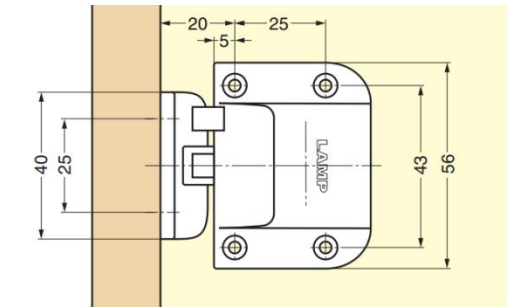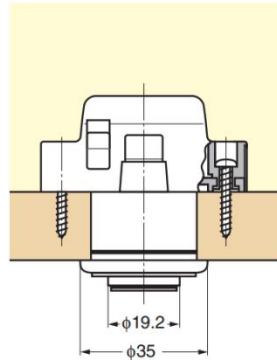

Installation for overlay door

Push Knob + Base

Part No.	Pipe
GTLP-SG	Satin Gold
GTLP-WB	Satin Nickel
GTLP-G	Gold
GTLP-CR	Chrome

Part Name	Material
Push Knob	Brass
Base	Zinc Alloy (ZDC)
Latch Body	Polyamide (PA)

Latch Body + Counter Plate

Part No	Colour	Retaining Force
GTLP-LBM-W	White	196 N 20 kg

X Dimension

Screw Length	Door Thickness	X
24	19	40.5
	20	41.5
	21	42.5
	22	43.5
	23	44.5
	24	45.5
30	25	46.5
	26	47.5
	27	48.5
	28	49.5
	29	50.5
	30	51.5