

## GLC-PK32 / PL32 Panel Latch

### Features


- Two types of lock / unlock methods available: lever type and key type
- Turn the lever or key 90° counter-clockwise to unlock latch
- Key type prevents the door from accidental opening
- Compliant with flame retardancy standard UL94 V-0, built-in spring made of stainless steel 304

### Product Offering


- Lock / unlock with key: Order body (without lever) + key
- Lock / unlock with lever: Order body (with lever)
- Change from key to lever: Order lever

### Notes

- Do not use the lever or key as a knob, it may cause damage
- Do not reuse the lever once removed from the body
- Lever (GLC-PL32-L-GR) and key (GLC-PK32-K) are sold separately

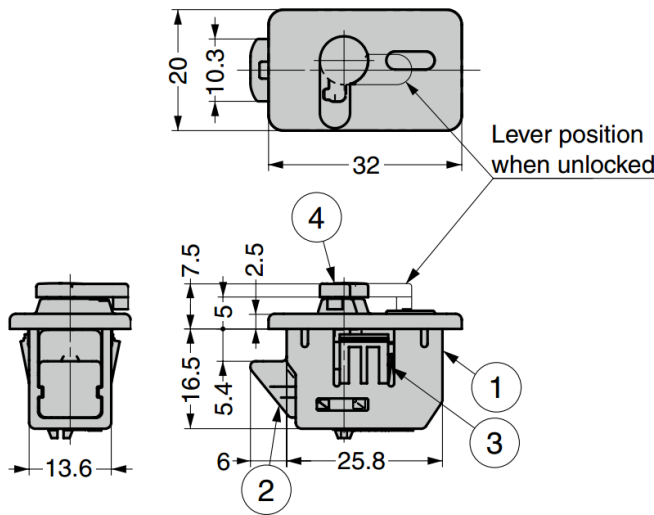


GLC-PL32 type shown

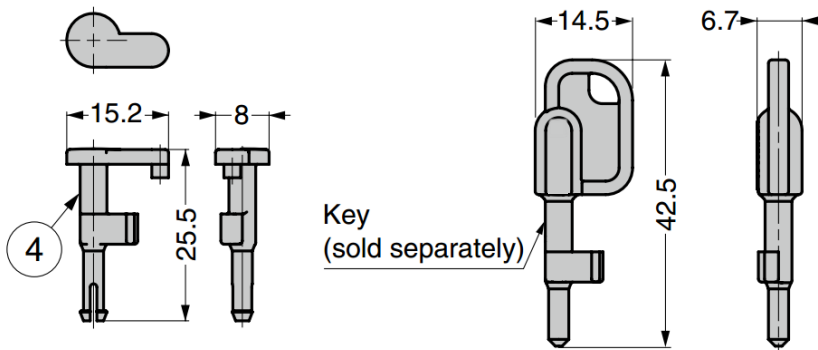


No.	Part Name	Material
①	Body	PP
②	Latch	PBT
③	Spring	Stainless Steel (SUS304)
④	Lever ※	PBT

※ The lever attached to **GLC-PL32** is the same as the optional lever

### Cut Out Dimensions

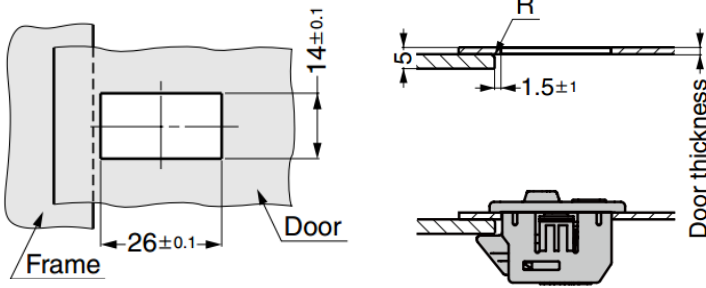


### Application Example

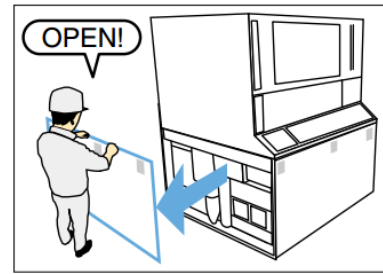


### Quick Installation

1. When inserting the body in the mounting hole, the hook is stored inside the body.

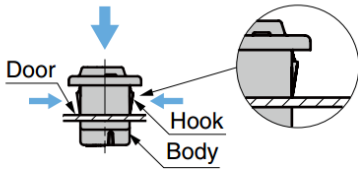


2. After installing, the hook returns to its original position.


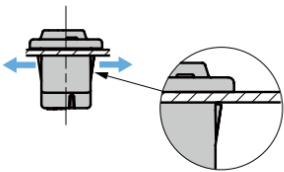


### How to Install the Lever

1. Insert the lever straight.




2. Until it snaps, check if the lever tip completely protrudes the body bottom.




### How to Unlock with Key


1. Insert the key.



- 2 Turn the key left by 90° .



3. The latch is stored in the body. At this moment, the latch will not return to its original position even if you release the key.

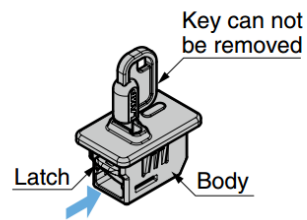

### Body

Part No.	Colour	Door Thickness	Description
GLC-PK32-L-BL	Black	1.2, 1.5, 1.6	Without Lever
GLC-PK32-L-GR	Grey		
GLC-PL32-BL	Black		With Lever
GLC-PL32-GR	Grey		

### Lever (Sold Separately)

Part No.	Colour
GLC-PL32-L-BL	Black
GLC-PL32-L-GR	Grey

### Key (Sold Separately)

Part No.	Material	Finish
GLC-PK32-K	Zinc Alloy (ZDC)	Nickel