STAINLESS STEEL SLIDES

GSCRW2-15S 2 Way Travel 3/4 Extension Mini Slide

Max load 18kg · 2 way travel

Features

- 3/4 extension (2 members)
- Only 15.5 mm in height with small deflection, suitable for various places
- Grease (NSF H1 Registered Food Grade Lubricants) for food machinery is used
- Stainless steel ball bearings

Notes

- Types with slide length 80 mm have no holes marked with ※
- Install stopper separately to protect rails and retainers from strong shock

Recommended Screws

- Outer member: M2.6 low head screw
- Inner member: M2.6 screw
- Screw length = Panel thickness + Max. 1.5 mm

No.	Part Name	Material
①	Outer Member	Stainless Steel (SUS304)
②	Inner Member	
③	Retainer	
④	Balls	Stainless Steel (SUS440)

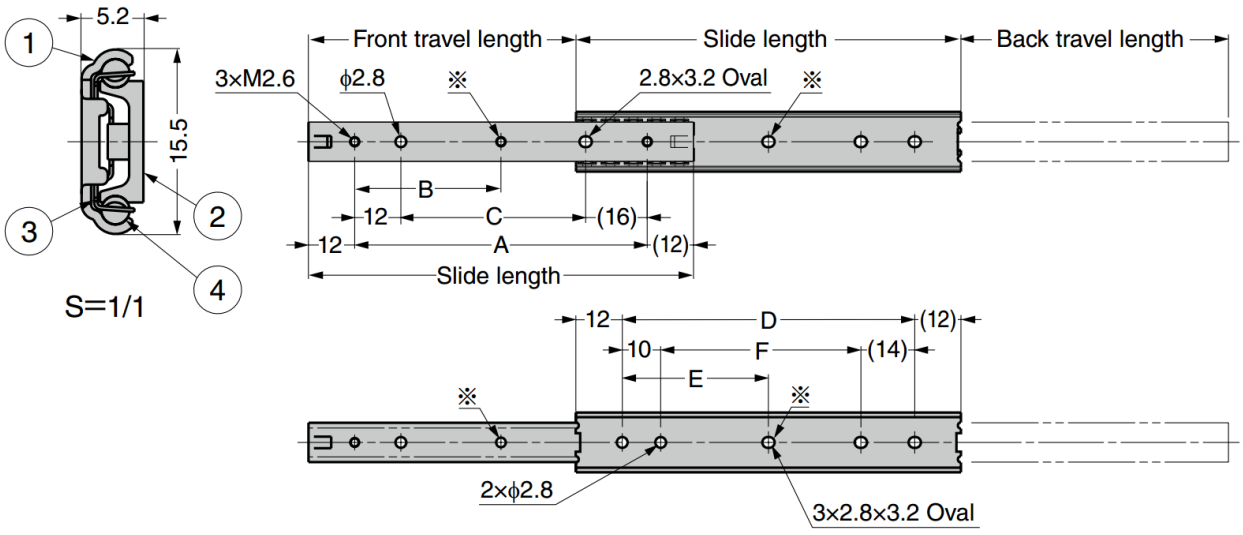

Sold in pieces

Part No.	Slide Length	Travel Length		A	B	C	D	E	F	Load Capacity (per pair)	
		Front	Back								
GSCRW2-15S-80A	80	48.5	48.5	56	-	28	56	-	32	137 N	14 kg
GSCRW2-15S-100A	100	68.5	68.5	76	38	48	76	38	52	157 N	16 kg
GSCRW2-15S-150A	150	94.5	94.5	126	63	98	126	63	102	177 N	18 kg