

G4660 Push-To-Open Full Extension Slide

Max load 45kg · Push-to-open · Detachable · Bumper


Features

- Push-to-open mechanism, no handle or knobs required for a sleek, modern look
- Drawer is easily opened by slightly pushing the front plate
- New mechanism PPD (pull protection device) minimises damage to slide
- Patented new mechanism PAE (push area expander, see ※2 below) may expand the front plate pushing area when opening the drawer (push area, see ※3 below)
- Plastic spring reduces the metal-to-metal noise at the end of the course
- Drawer / compartment is detachable by lifting the lever
- Passed 50,000 life cycle test



Parts Included

- Truss head tapping screw 4x12
- Hex key

Self and Soft Closing

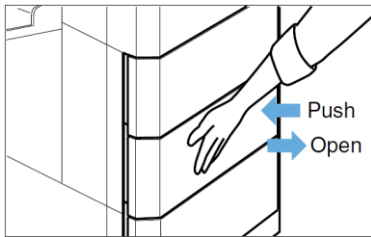


Easy to Detach

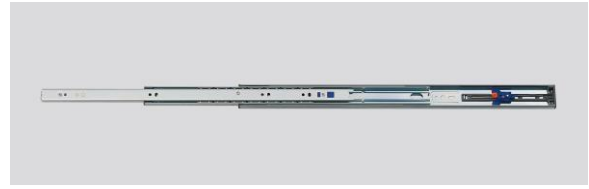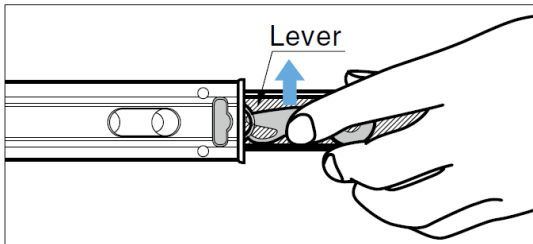


Notes

- Do not apply strong shock. Otherwise, the drawer may be opened unexpectedly
- PPD is not for routine use
- Operate the push-to-open mechanism by pushing the centre part of the front plate. To widen the push area, adjust the gap with PAE
- PAE has no effect if the gap between drawer and cabinet is beyond the range ※4 shown below. Gap between drawer and cabinet beyond range ※4 shown below may cause unexpected damage to the slide


Full Extension (3 Members)

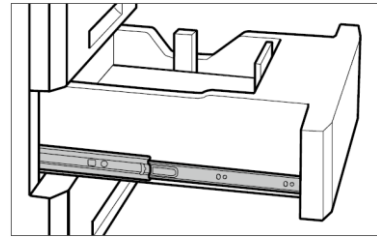

PAE ※2

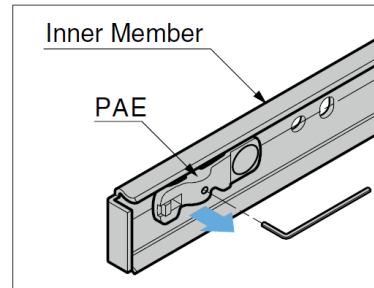


Turning the hex key (included) clockwise will cause the PAE to bulge in the direction of the arrow, which may reduce rattling when closed and expand the push-to-open area.

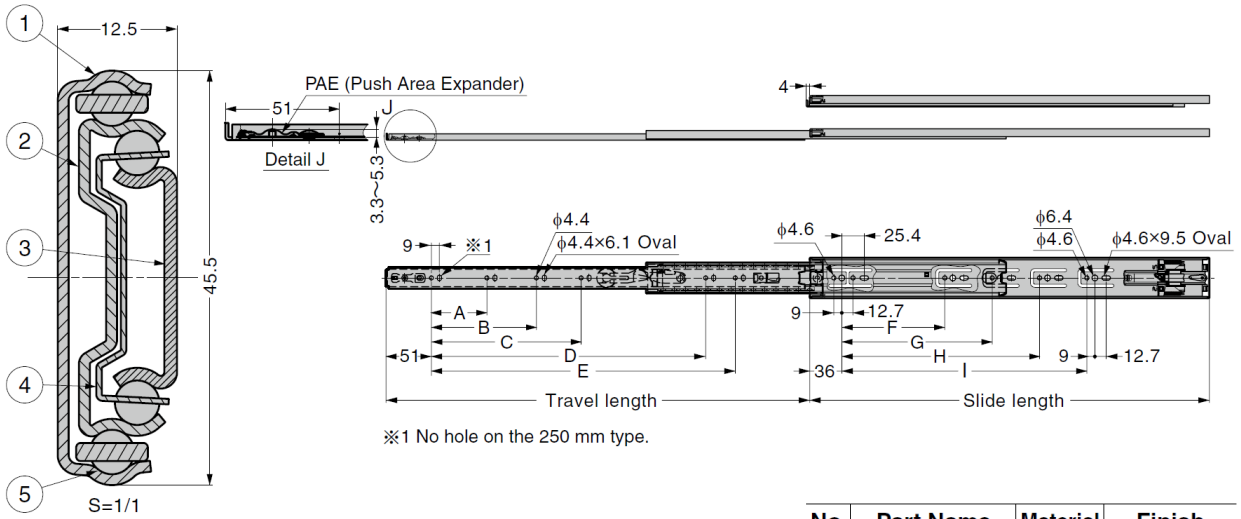

No.	Part Name	Material	Finish
①	Outer Member	Steel	Clear Zinc Chromate (Trivalent)
②	Intermediate Member		
③	Inner Member		
④	Retainer	(Zinc Chromate Steel)	
⑤	Balls		-

Minimum cabinet depth = drawer length + 10 mm

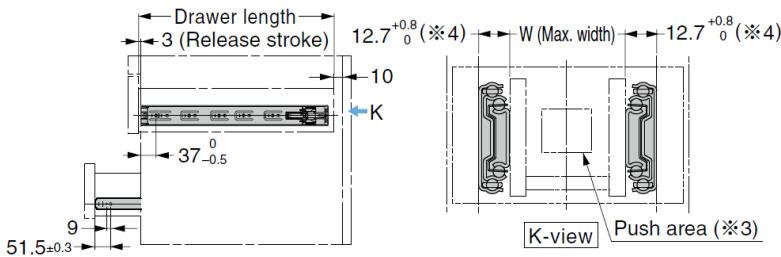

Sold in pairs

Part No.	Slide Length	Travel Length	A	B	C	D	E	F	G	H	I	W	Load Capacity (per pair)	
G4660-250	250	200	-			117		87	-			450	147 N	15 kg
G4660-300	300	296				167						500	196 N	20 kg
G4660-350	350	348	71			217			183			550	245 N	25 kg
G4660-400	400	406	103			267			215			600	294 N	30 kg
G4660-450	450	458				317			279			650	343 N	35 kg
G4660-500	500	509	71	135		327	367	119		335		700	392 N	40 kg
G4660-550	550	560				359	417					750	441 N	45 kg
G4660-600	600	611				391	467		215		439	800		
G4660-650	650	661	103	199		441	517			343	471	850	343 N	35 kg
G4660-700	700	712			263	491	567				535	900		