

7535-00011 Pantograph Workstation

Hydropneumatic · Pantograph workstation for Avdel speed fasteners

This tool can place the entire range of Avdel Speed Fastening® Systems and is used for "Top-Down" riveting requirements.

The benefit: easy tool handling, and fatigue-proof operation. Due to the linear guidance the rivet can not jam in the component. This tool is mainly used in a seated work position and only requires compressed air supply.

Rapid assembly makes it cost-effective, even with small batch sizes. Simple to operate, high mobility and easy integration into the production process are the main features. Time-consuming training of an operator is not necessary. The hydraulic riveting unit provides a smooth riveting, ideal for sensitive components.

Features

- Smooth and reliable riveting
- Tool supported on an extendable arm
- Wide arm reach to over 0.8 m
- Arm can be moved around the worktop to make space for other tasks
- Intensifier can be bench or floor mounted



Technical Data



Operating Radius	: 295 - 887 mm
Stroke	: 30 mm (min.)
Pull Force	: 3,890 N at 5.5 bar
Cycle Time	: 1.0 sec (approx.)
Air Pressure Supply	: 5 - 7 bar
Air Consumption	: 2.6 l free air / sets at 5.5 bar
Intensifier Ratio	: 32 : 1

Placing Capability

The 7535 placing tool can place the whole range of Speed Fastening® fasteners from diameter 2.4 mm to 6.4 mm.



*Nose equipment has to ordered separately.
For accessories options, contact Gripwell
Sales for assistance*

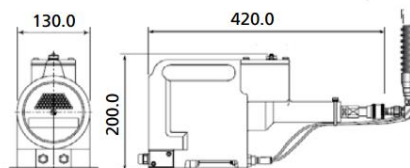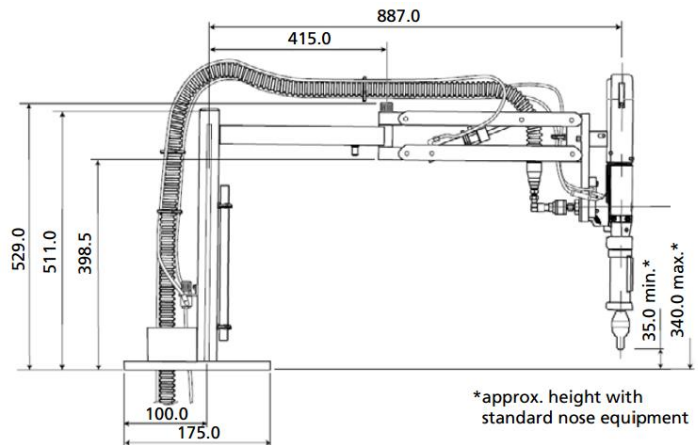

We are proud to be Avdel's authorized distributor of over 30 years