


Installation

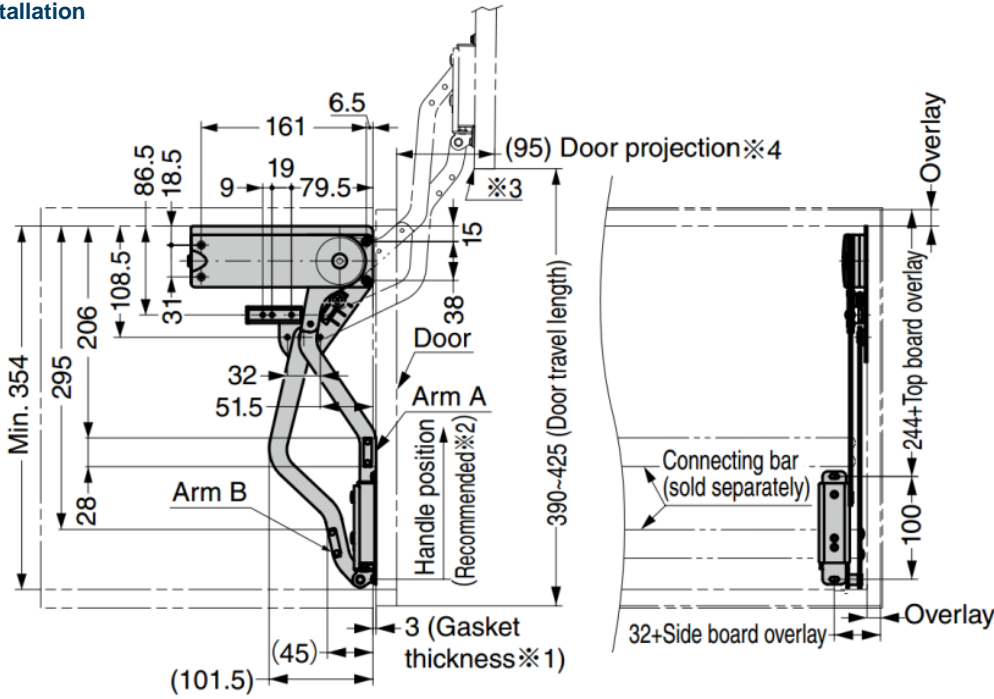

- ※1: Dimension with gasket attached on door. Without gasket, shift stay installation position towards back panel side by 3mm.
- ※2: Install handle above the bottom edge of door side mounting plate as shown above.
- ※3: If door height is 425mm or more, lower part of door will cover cabinet top board when door is fully opened.
- ※4: Maximum door projection is 267mm.

Main Body

Part No.	Material	Finish	Door Width	Door Height	Door Weight
GSLUN-3N	ABS / Steel	Chrome / Grey	600 ~ 900	390 ~ 450	2.8 ~ 3.8 kg
GSLUN-4N					3.8 ~ 4.8 kg
GSLUN-5N					4.8 ~ 5.8 kg

- 2 types of connecting bars are available for cabinet overall width 600 mm and 900 mm
- Dimensions in the bottom table are for standard products with side board thickness of cabinet 15 mm. If the side board thickness is over 15 mm, the connecting bar should be cut according to the formula (on the right)

Arm A: Connecting bar length = Cabinet overall width - (Side board thickness x 2) - 35

Arm B: Connecting bar length = Cabinet overall width - (Side board thickness x 2) - 19

Connecting Bar (Sold Separately)

Part No.	Material	Finish	Mounting Position	Length of Connecting Bar for Cabinet	
				Overall Width 600	Overall Width 900
GSLUB-535	Aluminium Alloy	Anodised	Arm A	535	-
GSLUB-551			Arm B*	551	
GSLUB-835			Arm A	-	835
GSLUB-851			Arm B*	-	851

*If the centre part of door is glass etc., install the connecting bar on arm B to make it inconspicuous