


## GHG-TA Stainless Steel Torque Hinge

### Features


- Hinge with friction torque holds lid / door in desired position
- Passed 20,000 life cycle test

### Notes


- Operating temperature: 0°C ~ 40°C
- For pair usage: to use the same torque for both hinges
- Ensure hinge shafts are levelled and aligned during installation

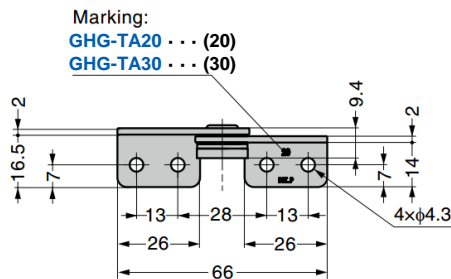

GHG-TA20L, GHG-TA30L

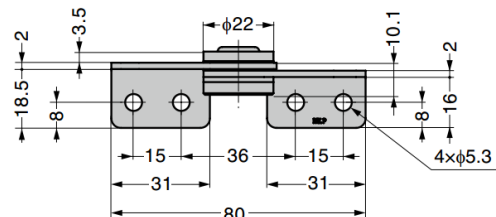

GHG-TA45L

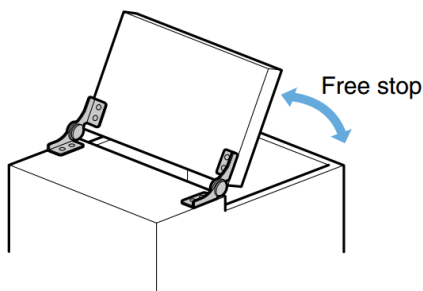

No.	Part Name	Material	Finish
①	Bracket	Stainless Steel (SUS430)	Barrel Polished
②	Base		
③	F Plate	Bronze	-
④	Spring Washer	Steel	
⑤	Shaft	Stainless Steel (SUS303)	
⑥	Washer	Stainless Steel (SUS430)	Barrel Polished

Part No.	Type	Torque (per piece)	
GHG-TA20R	Right Handed	2.0 ±20% N.m	20.4 ±20% kgf.cm
GHG-TA20L	Left Handed		
GHG-TA30R	Right Handed	3.0 ±20% N.m	30.6 ±20% kgf.cm
GHG-TA30L	Left Handed		
GHG-TA45R	Right Handed	4.5 ±20% N.m	45.9 ±20% kgf.cm
GHG-TA45L	Left Handed		